




“Specialists in Expanded Metal Building Products”

NILES NO. 66-X EXPANDED FLANGE CASING BEAD

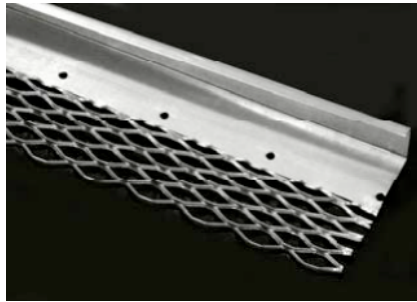

Niles No. 66-X Expanded Flange Casing Bead	Length	Ctns/Pallet
1/4"	10'	42
3/8"	10'	42
1/2"	10'	42
5/8"	10'	42
3/4"	10'	42
7/8"	10'	42
1"	10'	42
1-1/4"	10'	40
1-1/2"	10'	40

30pcs/ctn – 300' per ctn

The Niles No. 66-X Casing Bead has a 3" wing size. It is used to effectively terminate plaster edge and/or to separate stucco from all other structural membranes at doors, windows and other openings; also when plaster/stucco meets dissimilar material. Expanded flange provides excellent stucco embedment at the junctions of the bead and metal lath. Manufactured to meet or exceed the following ASTM specifications:

ASTM A653 - Standard specification for steel sheet, zinc-coated (galvanized) or zinc-iron alloy coated (galvannealed) by the hot-dip process

ASTM C841 - Standard specification for installation of interior lathing and furring

ASTM C1047 - Standard specification for gypsum wallboard and gypsum veneer base accessories

ASTM C1063 - Standard specification for installation of lathing and furring for portland cement-based plaster

NILES BUILDING PRODUCTS CO.

Company Headquarters

1600 Hunter Street

Niles, Oh 44446

Phone: 800-323-3329

Fax: 330-544-8868

www.nilesbldg.com