




**“Specialists in Expanded Metal Building Products”**

## **NILES NO. 66-X EXPANDED FLANGE CASING BEAD - ZINC**

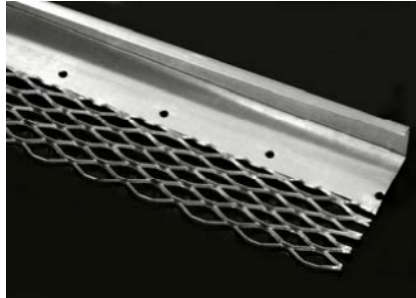

<b>Niles No. 66-X Expanded Flange Casing Bead - ZINC</b>	<b>Length</b>	<b>Ctns/Pallet</b>
1/4"	10'	42
3/8"	10'	42
1/2"	10'	42
5/8"	10'	42
3/4"	10'	42
7/8"	10'	42
1"	10'	42
1-1/4"	10'	40
1-1/2"	10'	40

30pcs/ctn – 300' per ctn

The Niles No. 66-X Casing Bead has a 3" wing size. It is used to effectively terminate plaster edge and/or to separate stucco from all other structural membranes at doors, windows and other openings; also when plaster/stucco meets dissimilar material. Expanded flange provides excellent stucco embedment at the junctions of the bead and metal lath.

ASTM B69-87 - Standard specification for flat rolled zinc. Approximately 99% pure zinc

ASTM C1047 - Standard specification for gypsum wallboard and gypsum veneer base accessories

ASTM C1063 - Standard specification for installation of lathing and furring for Portland cement-based plaster

## **NILES BUILDING PRODUCTS CO.**

### **Company Headquarters**

1600 Hunter Street

Niles, Oh 44446

Phone: 800-323-3329

Fax: 330-544-8868

[www.nilesbldg.com](http://www.nilesbldg.com)