




“Specialists in Expanded Metal Building Products”

NILES TWO-PIECE TRU-JOINT - ZINC

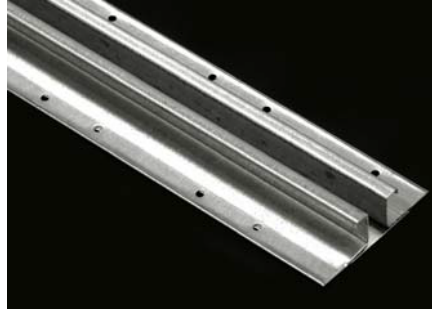

Niles Two-Piece Tru-Joint	Length	Ctns/Pallet
1/2"	10'	25
3/4"	10'	25
7/8"	10'	25

15pcs/ctn – 150' per ctn

The Niles Two-Piece Tru-Joint is used to relieve stress caused by expansion and contraction and initial stucco shrinkage. The opening adjusts from 1/4" to 5/8" and is ideally used where more movement is expected than would be normal with a one-piece expansion control joint. Manufactured to meet or exceed the following ASTM specifications:

ASTM B69-87 - Standard specification for flat rolled zinc. Approximately 99% pure zinc

ASTM C841 - Standard specification for installation of interior lathing and furring

ASTM C1063 - Standard specification for installation of lathing and furring for portland cement- based plaster

NILES BUILDING PRODUCTS CO.

Company Headquarters

1600 Hunter Street

Niles, Oh 44446

Phone: 800-323-3329

Fax: 330-544-8868

www.nilesbldg.com