




“Specialists in Expanded Metal Building Products”

NILES FLAT STOCK

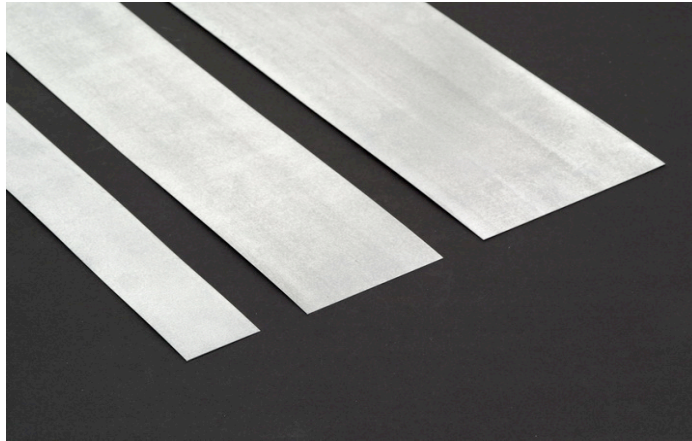

Niles Flat Strapping	Length	Pieces/Pit
2”	10’	200
4”	10’	200
6”	10’	200
8”	10’	200

Available in 16, 18, 20 & 25 gauge.

Flat strapping is used for lateral bracing, joist bridging and diagonal bracing to prevent racking. Flat strapping is available in multiple widths and in a full range of gauges. Also called Backing Plate. The product is fabricated from steel meeting the following ASTM with a G-40 coating, standard. Standard length is 10’.

ASTM C653 - Standard specification for steel sheet, zinc-coated (galvanized) or zinc-iron alloy coated (galvannealed) by the hot-dip process

NILES BUILDING PRODUCTS CO.

Company Headquarters
1600 Hunter Street
Niles, Oh 44446
Phone: 800-323-3329
Fax: 330-544-8868

www.nilesbldg.com