




“Specialists in Metal and Vinyl Building Products”

NILES VINYL DIRECT APPLIED CASING-STARTER TRAX

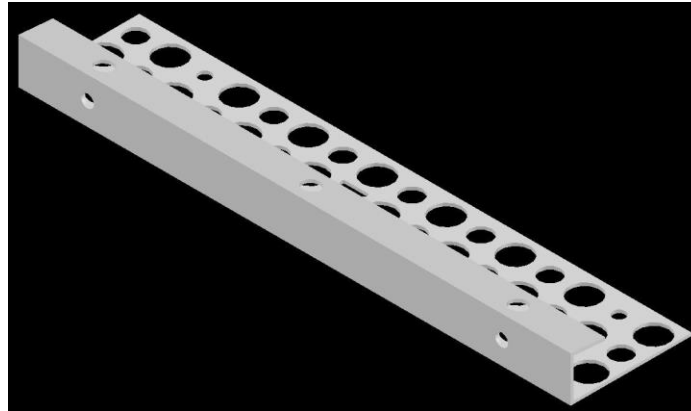

GROUND SIZE	ATTACHMENT FLANGE	FEET/CARTON	CARTONS/PALLET
1/2"	1 3/4"	60	25
5/8"	1 3/4"	50	25

*STANDARD LENGTH 10'

Niles Vinyl Direct Applied Casing/Starter Trax may be used in direct applied applications at the base of the wall as a starter track or around windows as a casing bead. They shall be used where specified by the design authority and installed per industry standards.

MEETS OR EXCEEDS THE FOLLOWING SPECIFICATIONS:

- ASTM D4216* - Standard Specification for Rigid Poly(Vinyl Chloride) (PVC) and Related PVC and Chlorinated Poly(Vinyl Chloride) (CPVC) Building Products Compounds.
- ASTM 1784* - Standard Specification for Rigid Poly(Vinyl Chloride) (PVC) Compounds and Chlorinated Poly(Vinyl Chloride) (CPVC) Compounds.
- ASTM C1063* - Standard specification for installation of lathing and furring for Portland cement-based plaster.
- ASTM C1861* - Standard Specification for Lathing and Furring Accessories, and Fasteners, for Interior and Exterior Portland Cement-Based Plaster.

NILES BUILDING PRODUCTS CO.

Company Headquarters

1600 Hunter Street

Niles, Oh 44446

Phone: 800-323-3329

Fax: 330-544-8868 www.nilesbldg.com