




**“Specialists in Expanded Metal Building Products”**

## **DOUBLE “V” INSIDE CORNER EXPANSION CONTROL JOINT - ZINC**

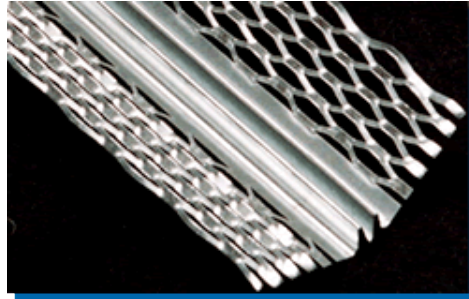

| <b>Double V Expansion Control Joint – Inside Corner</b> | <b>Length</b> | <b>Ctns/Pallet</b> |
|---|---------------|--------------------|
| 1/2”  | 10’           | 40                 |
| 5/8”  | 10’           | 40                 |
| 3/4”  | 10’           | 40                 |
| 7/8”  | 10’           | 40                 |

24pcs/ctn – 240’ per ctn

**The Double “V” Expansion Control Joint is used to provide mechanism for movement to accommodate expansion and contraction caused by initial stucco shrinkage and minor thermal movement. It is roll formed to fit inside corner locations.**

**ASTM C653** - Standard specification for steel sheet, zinc-coated (galvanized) or zinc-iron alloy coated (galvannealed) by the hot-dip process.

**ASTM C841** - Standard specification for installation of interior lathing and furring.

**ASTM C1063** - Standard specification for installation of lathing and furring for portland cement-based plaster

**ASTM C1861** - Standard Specification for Lathing and Furring Accessories, and Fasteners, for Interior and Exterior Portland Cement-Based Plaster

## **NILES BUILDING PRODUCTS CO.**

### **Company Headquarters**

1600 Hunter Street

Niles, Oh 44446

Phone: 800-323-3329

Fax: 330-544-8868

[www.nilesbldg.com](http://www.nilesbldg.com)