




**“Specialists in Expanded Metal Building Products”**

## **NILES 2-A CORNER BEAD**

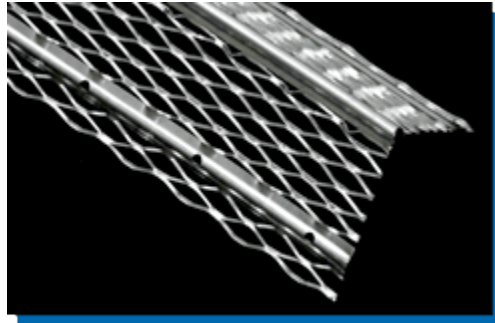

<b>Niles 2-A Corner Bead Standard 3-1/4" x 3-1/4"</b>	<b>Ft/Ctn</b>	<b>Ctns/Pallet</b>
10'	300'	25

10' Lengths – 30 pcs/ctn – 300' per ctn

**The Niles 2-A Corner Bead with a wing size 3-1/4" x 3-1/4", it is used to reinforce external corners in Portland cement stucco applications. The 3-1/4" wider expanded flanges provides additional rigidity and strength, which can easily be flexed over irregular or uneven corners, allowing for complete embedment of the entire bead, especially near the nose where strength is needed most. The solid metal nose provides rigidity for straight corners.**

ASTM C653 - Standard specification for steel sheet, zinc-coated (galvanized) or zinc-iron alloy coated (galvannealed) by the hot-dip process.

ASTM C841 - Standard specification for installation of interior lathing and furring

ASTM C1047 - Standard specification for gypsum wallboard and gypsum veneer base accessories.

ASTM C1063 - Standard specification for installation of lathing and furring for portland cement-based plaster

ASTM C1861 - Standard Specification for Lathing and Furring Accessories, and Fasteners, for Interior and Exterior Portland Cement-Based Plaster

## **NILES BUILDING PRODUCTS CO.**

### **Company Headquarters**

1600 Hunter Street

Niles, Oh 44446

Phone: 800-323-3329

Fax: 330-544-8868

[www.nilesbldg.com](http://www.nilesbldg.com)