




“Specialists in Metal and Vinyl Building Products”

NILES VINYL 093 CONTROL JOINT

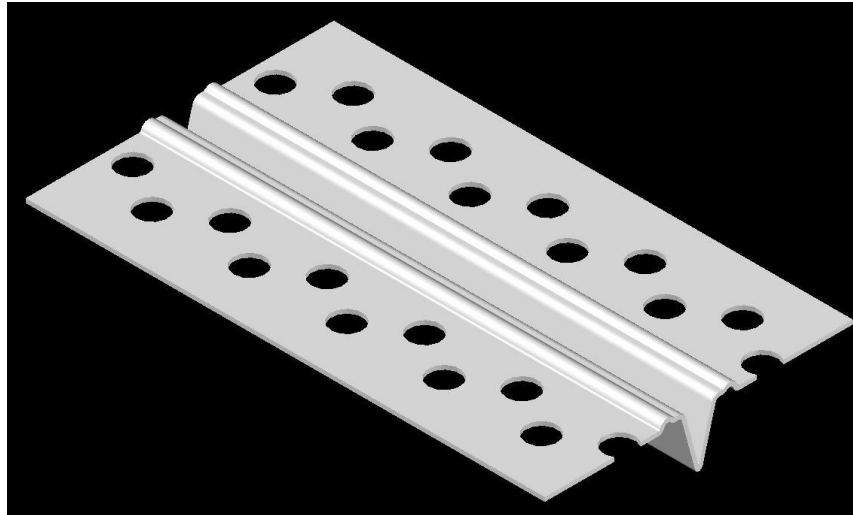

SIZE	LENGTH	PIECES/CARTON	CARTONS/PALLET
1/2"	10'	60	25

Niles Vinyl 093 Control Joint is used to relieve stress caused by expansion and contraction within the system. Removable tape keeps the joint clean during installation. They shall be used where specified by the design authority and installed per industry standards.

MEETS OR EXCEEDS THE FOLLOWING SPECIFICATIONS:

- ASTM D4216* - Standard Specification for Rigid Poly(Vinyl Chloride) (PVC) and Related PVC and Chlorinated Poly(Vinyl Chloride) (CPVC) Building Products Compounds.
- ASTM D1784* - Standard Specification for Rigid Poly(Vinyl Chloride) (PVC) Compounds and Chlorinated Poly(Vinyl Chloride) (CPVC) Compounds.
- ASTM C1063* - Standard specification for installation of lathing and furring for Portland cement-based plaster.
- ASTM C1861* - Standard Specification for Lathing and Furring Accessories, and Fasteners, for Interior and Exterior Portland Cement-Based Plaster.

NILES BUILDING PRODUCTS CO.

Company Headquarters

1600 Hunter Street
Niles, Oh 44446

Phone: 800-323-3329

Fax: 330-544-8868 www.nilesbldg.com