




“Specialists in Expanded Metal Building Products”

ZINC LATH SPECIFICATION

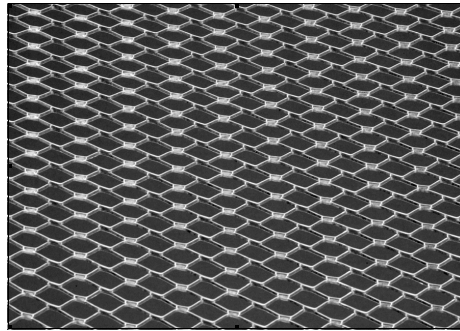

Wt. Per Sq. Yd.	Sheet Size	Pcs. / Bdl	Yds. / Pallet
2.50 lbs.	27" x 97"	10	500
3.40 lbs.	27" x 97"	10	500

25 BUNDLES PER PALLET

AVAILABLE IN SELF-FURRING AND PAPER BACK

Manufactured from #190 special high grade zinc alloy; approximately 99% pure zinc. Provides the ultimate in corrosion resistance for both specialty and conventional stucco applications; Ideal for coastal applications where salt water and moisture are a concern.

ASTM C841-Standard specification for installation of interior lathing and furring

ASTM C847-Standard specification for Metal Lath (2.5 and 3.4 only)

ASTM B69-87-Standard specification for flat rolled zinc; approximately 99% pure zinc alloy.

NILES BUILDING PRODUCTS CO.

Company Headquarters

1600 Hunter Street
Niles, Oh 44446

Phone: 800-323-3329

Fax: 330-544-8868

www.nilesbldg.com