



NILES STAINLESS STEEL NO. 66X CASING BEAD

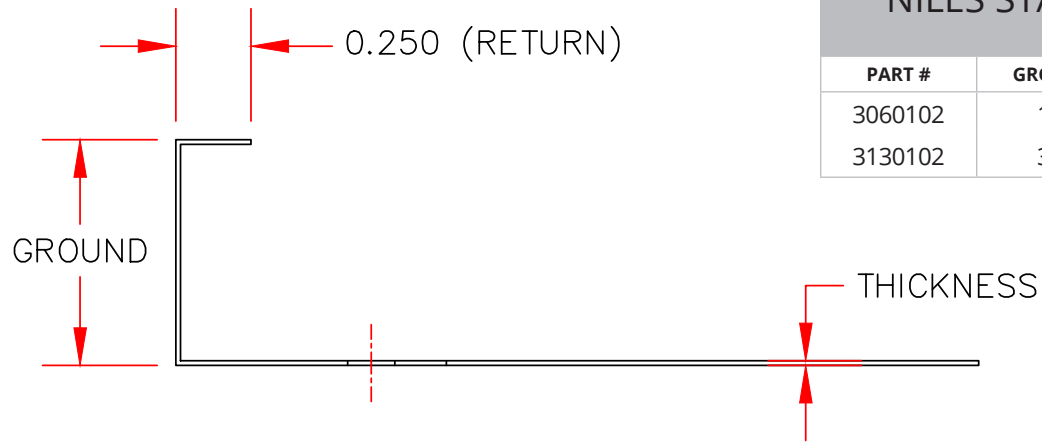

PART #	GROUND	DEC. THICK	LENGTH	PCS/CRTN	CRTNS/PALLET
3060102	1/2	0.017	10'	30	42
3130102	3/4	0.017	10'	30	42

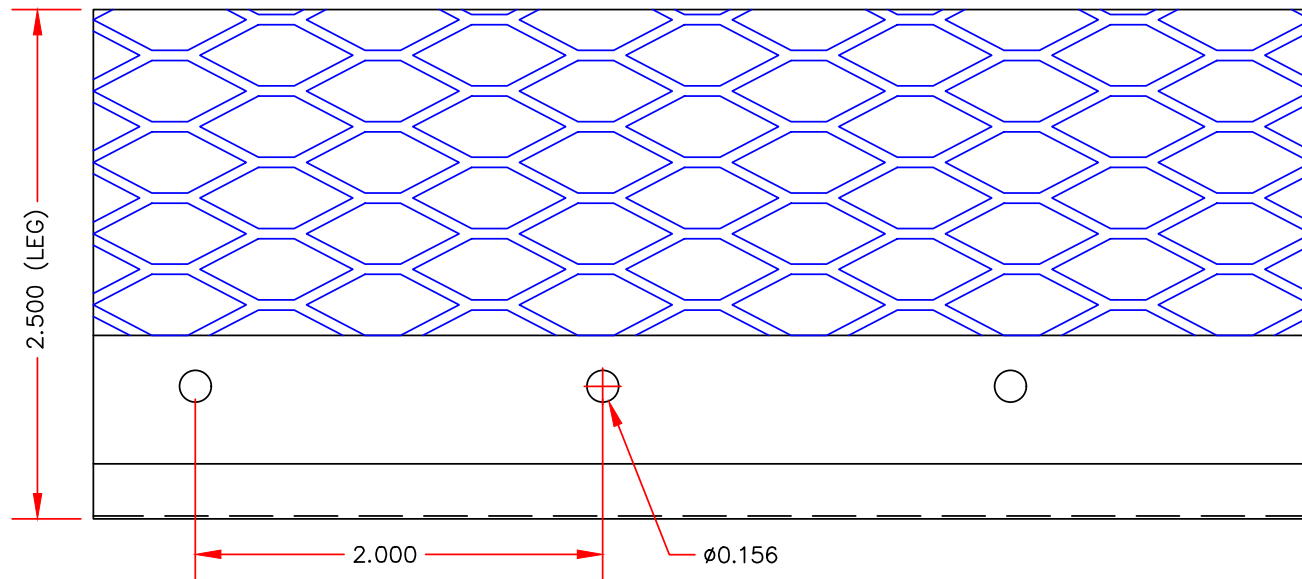

NILES BUILDING PRODUCTS CO.

Specialists in Metal and Vinyl Building Products

nilesbldg.com • 800-323-3329

MANUFACTURED TO MEET ASTM: C841, C1047, C1063, C1861

Niles Facility
1600 Hunter Street
Niles, OH 44446

Jacksonville Facility
8441 Western Way
Jacksonville, FL 32256

Dallas-Ft. Worth Facility
2303 I-30 Frontage Road Ste 100
Grand Prairie, TX 75050

Southern California Facility
1270 North Grove Street
Anaheim, CA 92806

NILES STAINLESS STEEL NO. 66X CASING BEAD

Niles Stainless Steel No. 66X Casing Bead is used to effectively terminate plaster edge and/or to separate stucco from all other structural membranes at doors, windows and other openings; also when plaster/stucco meets dissimilar material. Expanded flange provides excellent stucco embedment at the junctions of the bead and metal lath.

Niles Stainless Steel No. 66X Casing Bead is produced to meet ASTM C1063, with the notable exception that the metal is comprised of stainless steel, and not galvanized carbon steel. It is offered in Stainless Steel types 304 or 316.

Niles Stainless Steel No. 66X Casing Bead is manufactured from Stainless Steel produced to ASTM A240 standards.

Standard ground sizes are ½" and ¾". Note: Additional ground sizes are available on a special order basis.

Niles Stainless Steel No. 66X Casing Bead can be used instead of standard metal No. 66X Casing Bead, in the same manner as detailed in ASTM C1063.

Please note the following requirements and cautions:

Materials: Materials that come in contact with Niles Stainless Steel 66X Casing Bead shall be either stainless steel or vinyl in order to avoid galvanic corrosion that occurs when dissimilar metals touch.

Fasteners: Stainless Steel Fasteners are recommended for attachment of Niles Stainless Steel 66X Casing Bead. Should standard galvanized fasteners be used, then to prevent standard galvanized fasteners from coming in contact with the Niles Stainless Steel 66X Casing Bead, they are to be separated by washers made of plastic, neoprene or some other inert material. Consult with fastener manufacturer as to fastener recommendations.

Continuous Application: Provide isolation of standard galvanized Lath and Accessories from Stainless Steel Lath and Accessories if used in a continuous application.



NILES BUILDING PRODUCTS CO.

Specialists in Metal and Vinyl Building Products

nilesbldg.com • 800-323-3329

MANUFACTURED TO MEET ASTM: C841, C1047, C1063, C1861

Niles Facility
1600 Hunter Street
Niles, OH 44446

Jacksonville Facility
8441 Western Way
Jacksonville, FL 32256

Dallas-Ft. Worth Facility
2303 I-30 Frontage Road Ste 100
Grand Prairie, TX 75050

Southern California Facility
1270 North Grove Street
Anaheim, CA 92806