




# NILES BUILDING PRODUCTS

*Specialists in Metal and Vinyl Building Products*

STEEL AND ZINC CATALOG

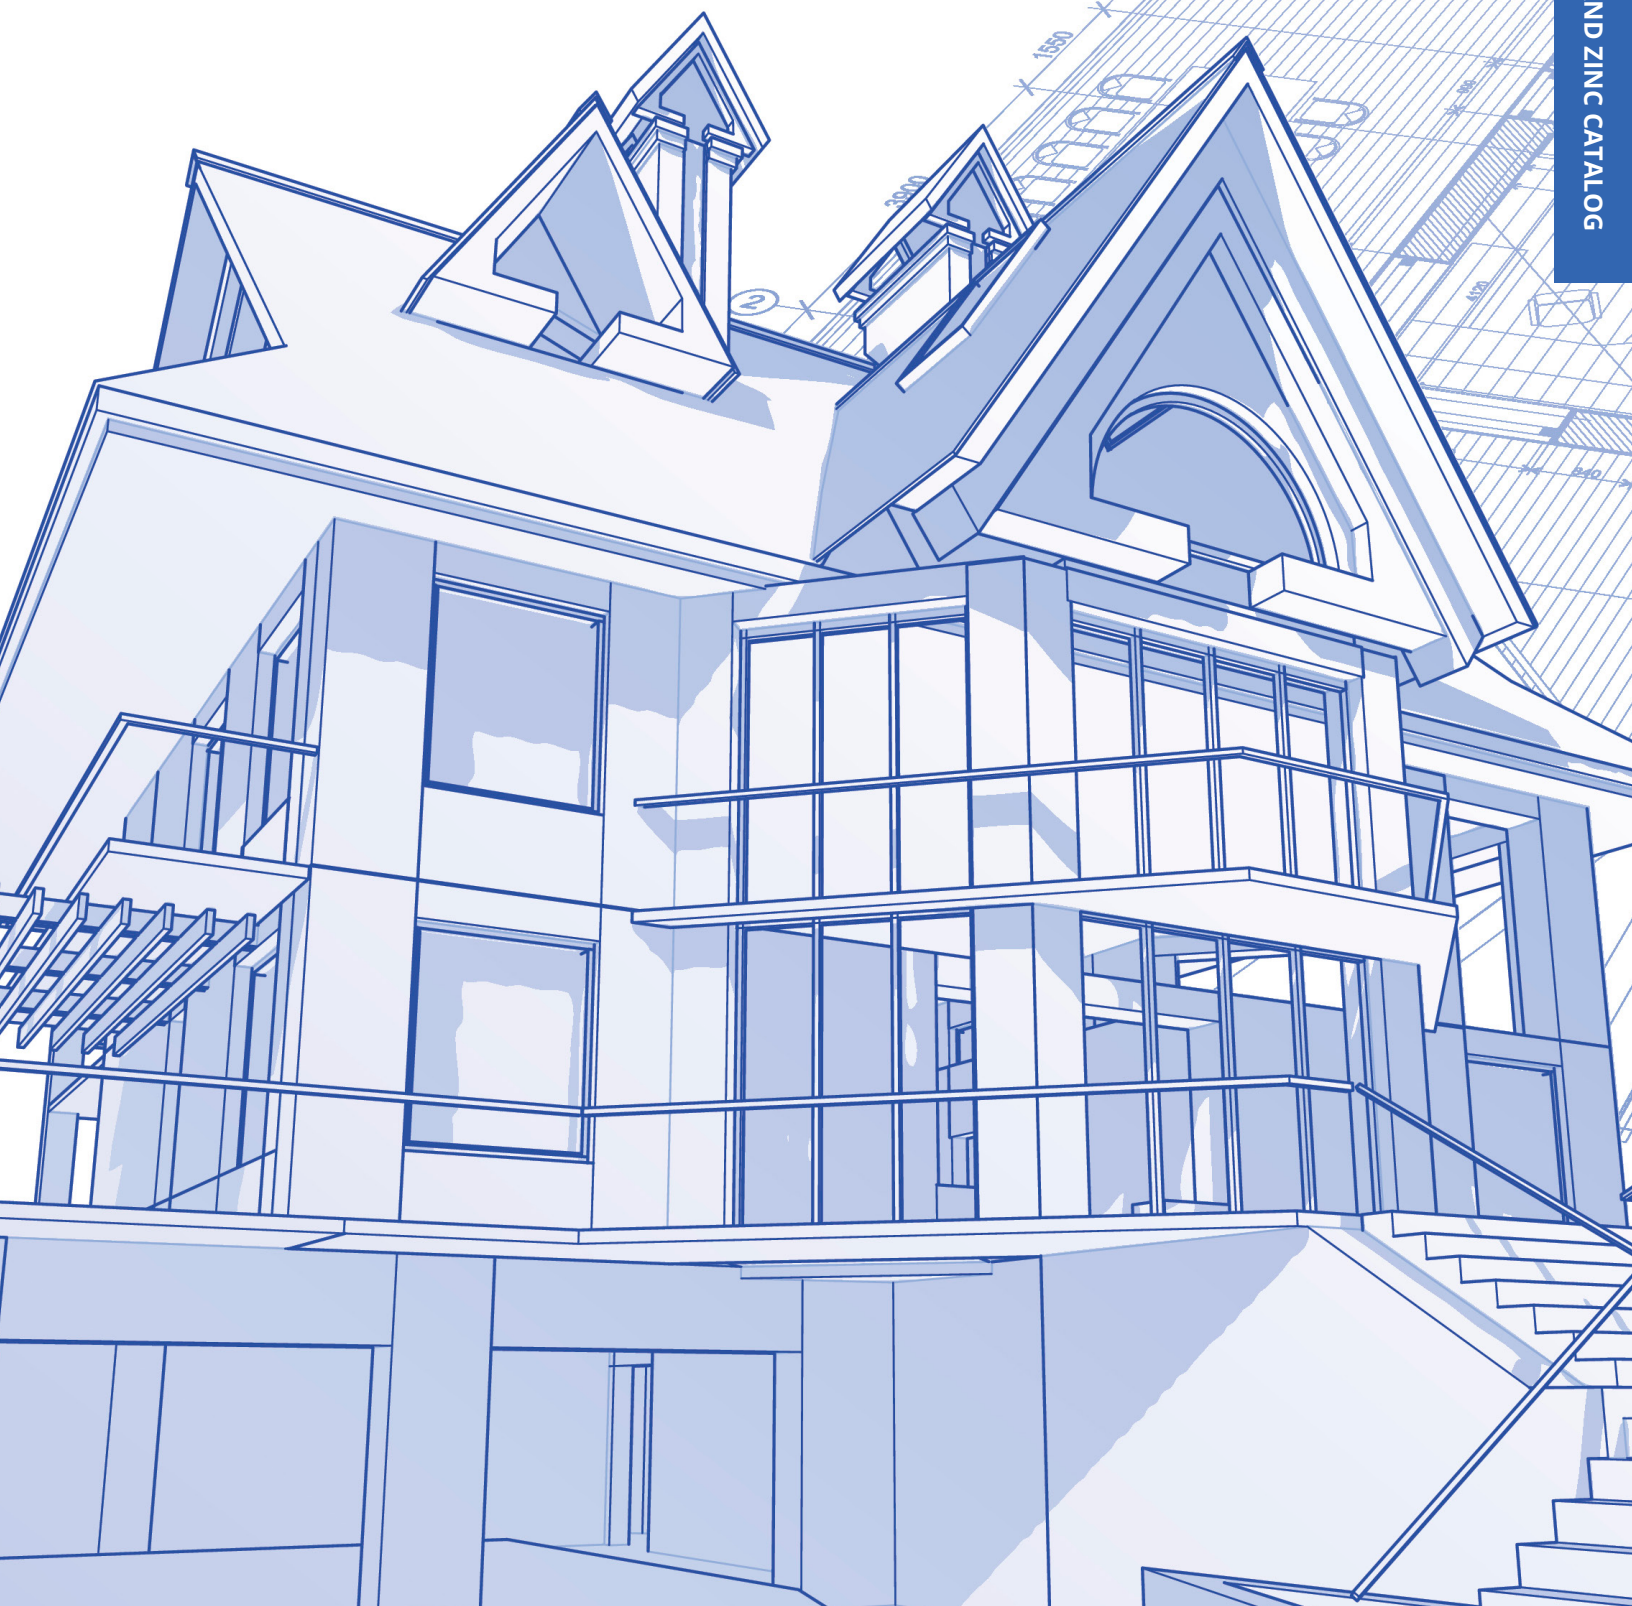

**Niles Facility**  
1600 Hunter Street  
Niles, OH 44446

**Jacksonville Facility**  
8441 Western Way  
Jacksonville, FL 32256

**Dallas-Fort Worth Facility**  
2303 I-30 Frontage Road Ste 100  
Grand Prairie, TX 75050

**Southern California Facility**  
1270 North Grove Street  
Anaheim, CA 92806



# About Niles Building Products

We are the industry leader in manufacturing expanded metal and vinyl accessories for stucco, plaster, drywall and veneer plaster applications.



**JACKSONVILLE, FL**



**NILES, OH**



**DALLAS-FORT WORTH, TX**

Incorporated in Niles, OH in 1973 with just one production line and four employees, Niles Building Products has grown to become an industry leader in expanded metal and vinyl accessories—with manufacturing facilities in Niles, OH, Jacksonville, FL, Grand Prairie, TX, and Anaheim, CA.

Niles Building Products is a service-oriented company, focused on high quality products while maintaining low overhead. Our distinction and reputation in the walls and ceilings industry are defined by the personal attention we give every inquiry and order.

Expanded metal and vinyl building products are our specialty. Our skills and experience are the key to manufacturing products that maintain the exemplary quality levels our customers expect and depend upon. Our customers have come to depend on us to provide high quality products, competitively priced and delivered in a timely fashion. Make Niles Building Products your first choice in expanded metal and vinyl products.



**FWCCA**





# Table of Contents

## METAL STUCCO ACCESSORIES

### WEEP SCREED

|                               |        |
|-------------------------------|--------|
| #7 FHA Foundation Weep Screed | page 4 |
| #36 Foundation Sill Screed    | page 4 |

### CORNER BEADS

|                       |        |
|-----------------------|--------|
| Niles 1-A Corner Bead | page 5 |
| Niles 2-A Corner Bead | page 5 |
| Wire Corner Beads     | page 5 |

### CASING BEADS

|                                           |        |
|-------------------------------------------|--------|
| Niles No. 66X Expanded Flange Casing Bead | page 6 |
| Niles No. 66N Short Flange Casing Bead    | page 7 |
| J Metal                                   | page 7 |

### EXPANSION CONTROL JOINTS

|                                                  |         |
|--------------------------------------------------|---------|
| Double 'V' Expansion Control Joint               | page 8  |
| Double 'V' Inside Corner Expansion Control Joint | page 8  |
| Double 'J' Expansion Control Joint               | page 9  |
| Niles Zinc Control Joint                         | page 9  |
| Niles Two-Piece Tru-Joint                        | page 10 |
| M-Slide Two-Piece Expansion Joint                | page 10 |

### MISCELLANEOUS ACCESSORIES

|                  |         |
|------------------|---------|
| Niles Cornerite  | page 11 |
| Niles Strip Lath | page 11 |

## METAL LATH

|                  |         |
|------------------|---------|
| Flat Lath        | page 12 |
| Dimpled Lath     | page 12 |
| V-Groove Lath    | page 13 |
| Paper Back Lath  | page 13 |
| 3/8" Hi-Rib Lath | page 14 |
| Zinc Lath        | page 14 |

## PLASTER/DRYWALL ACCESSORIES

|                                 |         |
|---------------------------------|---------|
| Niles Mini-Bead 800/900         | page 15 |
| Niles 'L'-Trim & Niles 'J'-Trim | page 15 |
| Niles 093 Zinc Control Joint    | page 16 |

## DRYWALL FRAMING ACCESSORIES

|                                     |         |
|-------------------------------------|---------|
| Niles Drywall Corner Bead           | page 17 |
| Niles Resilient Channel             | page 17 |
| Niles Furring Channel               | page 18 |
| U-Channel CRC (Cold Rolled Channel) | page 18 |
| Niles Flat Stock                    | page 19 |
| Niles Corner Angle                  | page 19 |

## SECURITY PANELS

|                               |         |
|-------------------------------|---------|
| Expanded Metal Security Panel | page 20 |
|-------------------------------|---------|

## STAINLESS STEEL PRODUCTS

|                                                          |         |
|----------------------------------------------------------|---------|
| Niles Stainless Steel Flat Lath                          | page 21 |
| Niles Stainless Steel 1-A Corner Bead                    | page 21 |
| Niles Stainless Steel No. 66X Casing Bead                | page 22 |
| Niles Stainless Steel Double 'J' Expansion Control Joint | page 22 |
| Niles Stainless Steel Double 'V' Expansion Control Joint | page 23 |
| Niles Stainless Steel #7 FHA Foundation Weep Screed      | page 23 |


## SPECIFICATIONS

|                          |         |
|--------------------------|---------|
| Metal Lath & Accessories | page 24 |
|--------------------------|---------|

# Metal Stucco Accessories

## Weep Screed

### #7 FHA FOUNDATION WEEP SCREED

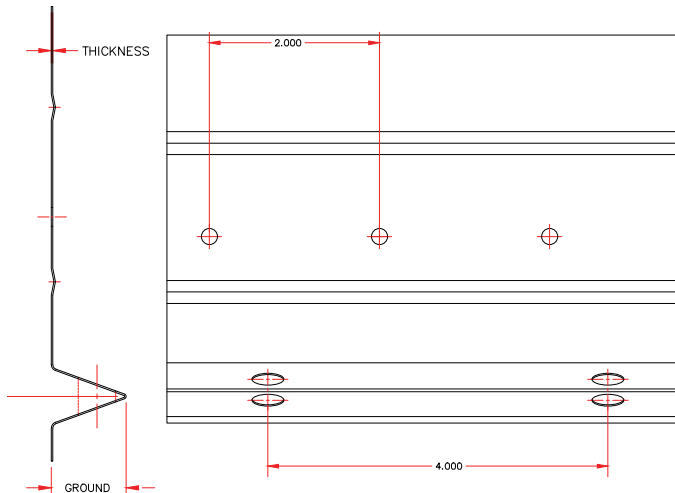

The #7 FHA Foundation Weep Screed is used to provide a weep mechanism as part of the drainage system as required at the bottom of all framed walls; by all major building codes and the International Building Code in ASTM C1063. The larger holes in the ground flange are drainage holes as the entire surface of the sloped ground provides for drainage once the stucco has hydrated and shrinkage has occurred. The 3-1/2" nailing flange serves as a flashing when water resistant, breathable building paper or paper backed lath is installed over the flange.

| #7 FHA FOUNDATION WEEP SCREED | CRTNS/<br>PALLET | NOMINAL<br>LBS/<br>CRTN | NOMINAL<br>WT/<br>PALLET** |
|-------------------------------|------------------|-------------------------|----------------------------|
| 1/2" GALV.<br>1/2" ZINC*      | 25<br>25         | 80<br>82                | 2000<br>2050               |
| 5/8" GALV.<br>5/8" ZINC*      | 25<br>25         | 83<br>86                | 2075<br>2150               |
| 3/4" GALV.<br>3/4" ZINC*      | 25<br>25         | 88<br>91                | 2200<br>2275               |
| 7/8" GALV.<br>7/8" ZINC*      | 25<br>25         | 92<br>96                | 2300<br>2400               |
| 1" GALV.<br>1" ZINC*          | 25<br>25         | 96<br>100               | 2400<br>2500               |


25 PCS/CRTN – 250 FT/CRTN

STANDARD G60 COATING. G90 AVAILABLE UPON REQUEST.

\*Minimum quantities apply. Consult with sales before ordering.

\*\*Pallet weights may vary.

### #36 FOUNDATION SILL SCREED

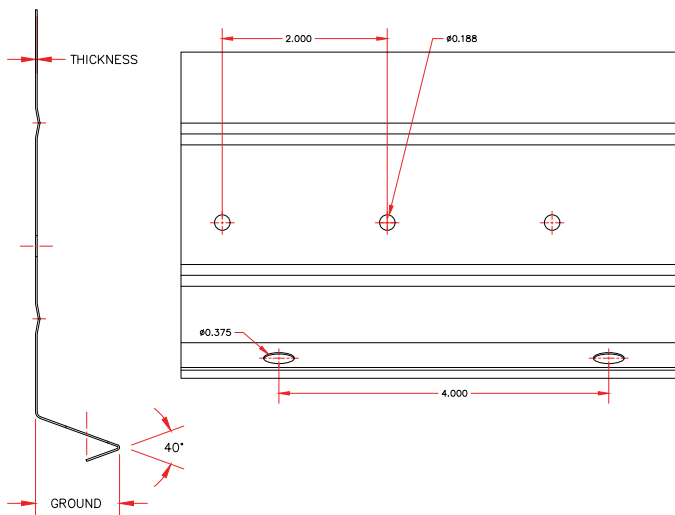

Sill Screed is used so trowel can access underneath the screed to clean excess stucco material.

| #36 FOUNDATION SILL SCREED | CRTNS/<br>PALLET | NOMINAL<br>LBS/<br>CRTN | NOMINAL<br>WT/<br>PALLET* |
|----------------------------|------------------|-------------------------|---------------------------|
| 1/2"                       | 25               | 65                      | 1625                      |
| 3/4"                       | 25               | 75                      | 1875                      |
| 7/8"                       | 25               | 75                      | 1875                      |

25 PCS/CRTN – 250 FT/CRTN


STANDARD G60 COATING. G90 AVAILABLE UPON REQUEST.

\*Pallet weights may vary.



# Corner Beads

## NILES 1-A CORNER BEAD

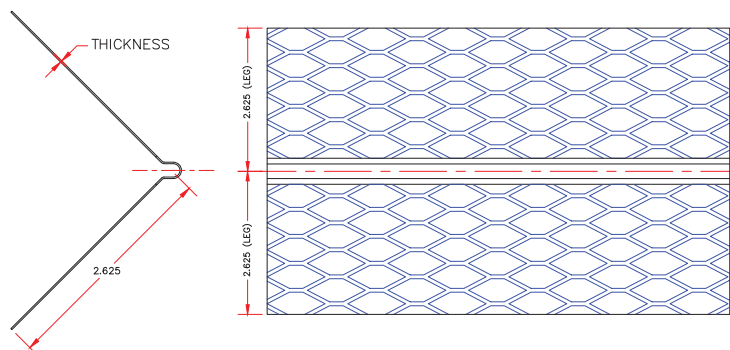

Wing size 2-5/8" x 2-5/8". Used to reinforce external corners in Portland cement stucco applications. The 2-5/8" expanded flanges allow for complete embedment of the entire bead, especially near the nose where strength is needed most. Available in hot-dipped galvanized and 99% pure zinc alloy.


| NILES 1-A CORNER BEAD | CRTNS/<br>PALLET | NOMINAL<br>LBS/CRTN | NOMINAL<br>WT/<br>PALLET* |
|-----------------------|------------------|---------------------|---------------------------|
| 10' GALV.             | 40               | 40                  | 1600                      |
| 10' ZINC.             | 40               | 45                  | 1800                      |

30 PCS/CRTN – 300 FT/CRTN

STANDARD G60 COATING. G90 AVAILABLE UPON REQUEST.  
OTHER LENGTHS AVAILABLE ON A SPECIAL-ORDER BASIS

\*Pallet weights may vary.

## NILES 2-A CORNER BEAD

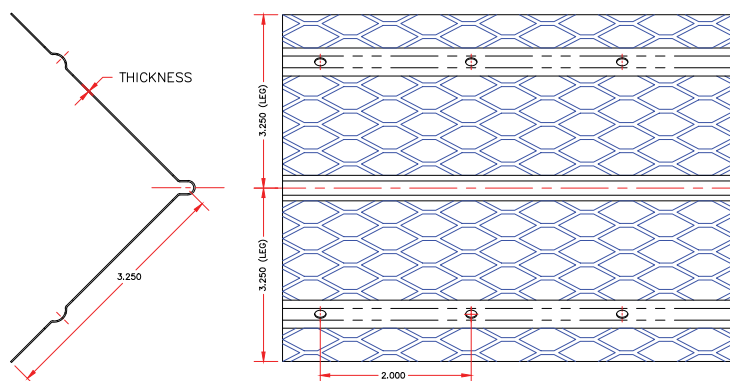

Wider, reinforced flange of the Niles 2-A Corner Bead provides additional rigidity and strength superior to the Niles 1-A, thus allowing for easier installation.

| NILES 2-A CORNER BEAD | CRTNS/<br>PALLET | NOMINAL<br>LBS/CRTN | NOMINAL<br>WT/<br>PALLET** |
|-----------------------|------------------|---------------------|----------------------------|
| 10' GALV.             | 25               | 61                  | 1525                       |
| 10' ZINC.*            | 25               | 63                  | 1575                       |


30 PCS/CRTN – 300 FT/CRTN

STANDARD G60 COATING. G90 AVAILABLE UPON REQUEST.

\*Minimum quantities apply. Consult with sales before ordering.

\*\*Pallet weights may vary.

## WIRE CORNER BEADS

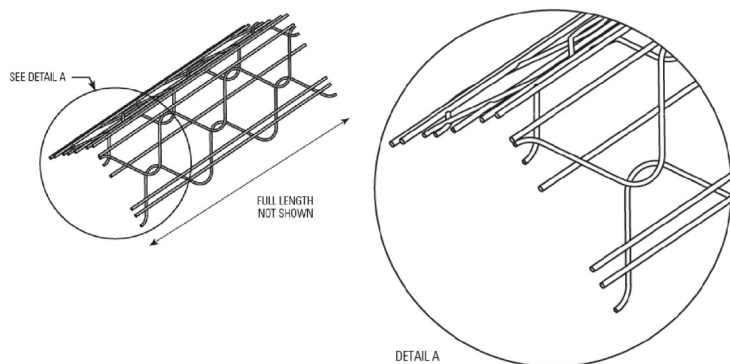

| WIRE CORNER BEADS         | CRTNS/<br>PALLET | NOMINAL<br>LBS/CRTN | NOMINAL<br>WT/<br>PALLET* |
|---------------------------|------------------|---------------------|---------------------------|
| Straight 10'              | 24               | 40                  | 960                       |
| Straight Arch 10'         | 24               | 40                  | 960                       |
| Straight Short Flange 10' | 24               | 40                  | 960                       |
| Bullnose 10'              | 24               | 40                  | 960                       |


40 PCS/CRTN – 400 FT/CRTN

\*Pallet weights may vary.



# Casing Beads

## NILES NO. 66X EXPANDED FLANGE CASING BEAD

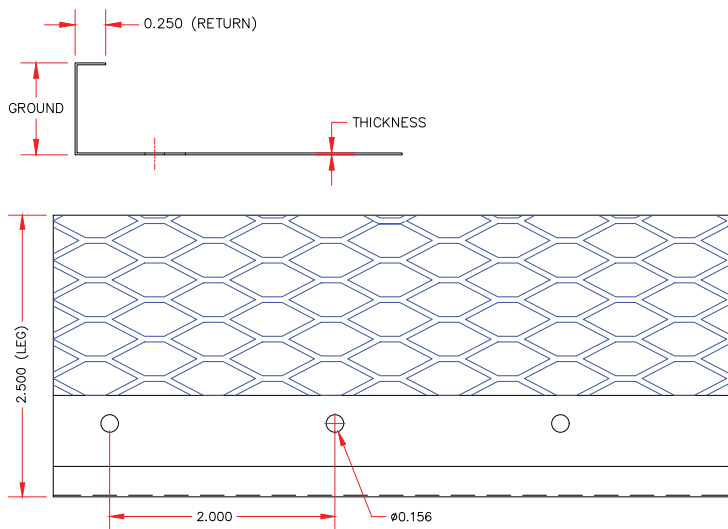

Used to effectively terminate plaster edge and/or to separate stucco from all other structural membranes at doors, windows and other openings; also when plaster/stucco meets dissimilar material. Expanded flange provides excellent stucco embedment at the junctions of the bead and metal lath.

Also available with punched grounds upon request. Caution: 66X Casing Beads with punched grounds should not be used as a substitute for #7 FHA Foundation Weep Screed in a 3-coat stucco system.

| NILES NO. 66X<br>EXPANDED<br>FLANGE | CRTNS/<br>PALLET | NOMINAL<br>LBS/CRTN | NOMINAL<br>WT/<br>PALLET* |
|-------------------------------------|------------------|---------------------|---------------------------|
| 1/4" GALV.                          | 42               | 41                  | 1722                      |
| 1/4" ZINC*                          | 42               | 43                  | 1806                      |
| 3/8" GALV.                          | 42               | 41                  | 1722                      |
| 3/8" ZINC*                          | 42               | 43                  | 1806                      |
| 1/2" GALV.                          | 42               | 41                  | 1722                      |
| 1/2" ZINC*                          | 42               | 43                  | 1806                      |
| 5/8" GALV.                          | 42               | 48                  | 2016                      |
| 5/8" ZINC*                          | 42               | 47                  | 1975                      |
| 3/4" GALV.                          | 42               | 48                  | 2016                      |
| 3/4" ZINC*                          | 42               | 47                  | 1975                      |
| 7/8" GALV.                          | 42               | 48                  | 2016                      |
| 7/8" ZINC*                          | 42               | 51                  | 2142                      |
| 1" GALV.                            | 42               | 48                  | 2016                      |
| 1" ZINC*                            | 42               | 51                  | 2142                      |
| 1-1/4" GALV.                        | 40               | 50                  | 2000                      |
| 1-1/4" ZINC*                        | 40               | 54                  | 2160                      |
| 1-3/8" GALV.                        | 40               | 55                  | 2200                      |
| 1-3/8" ZINC*                        | 40               | 61                  | 2440                      |
| 1-1/2" GALV.                        | 40               | 55                  | 2200                      |
| 1-1/2" ZINC*                        | 40               | 61                  | 2440                      |

30 PCS/CRTN - 300 FT/CRTN


STANDARD G60 COATING. G90 AVAILABLE UPON REQUEST.

\*Pallet weights may vary.



# Casing Beads con't

## NILES NO. 66N SHORT FLANGE CASING BEAD

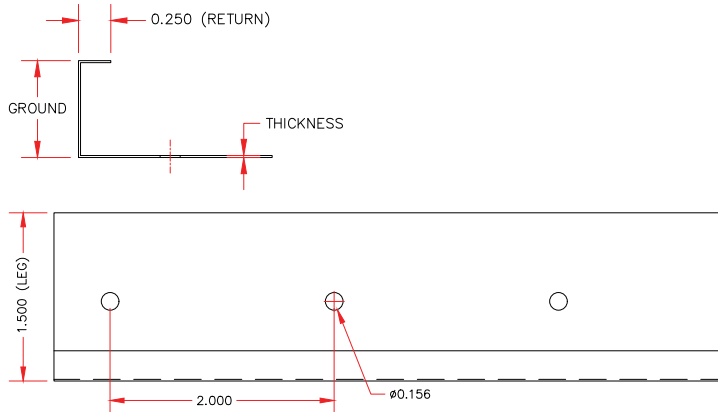

The choice where short, solid flanges are preferable.  
Also available with punched grounds.

| NILES NO. 66N SHORT FLANGE | CRTNS/<br>PALLET | NOMINAL<br>LBS/CRTN | NOMINAL<br>WT/<br>PALLET** |
|----------------------------|------------------|---------------------|----------------------------|
| 3/8" GALV.                 | 42               | 41                  | 1722                       |
| 3/8" ZINC*                 | 42               | 43                  | 1806                       |
| 1/2" GALV.                 | 42               | 41                  | 1722                       |
| 1/2" ZINC*                 | 42               | 43                  | 1806                       |
| 3/4" GALV.                 | 42               | 48                  | 2016                       |
| 3/4" ZINC*                 | 42               | 47                  | 1975                       |
| 7/8" GALV.                 | 42               | 48                  | 2016                       |
| 7/8" ZINC*                 | 42               | 51                  | 2142                       |
| 1" GALV.                   | 42               | 48                  | 2016                       |
| 1" ZINC*                   | 42               | 51                  | 2142                       |
| 1-1/4" GALV.               | 40               | 50                  | 2000                       |
| 1-1/4" ZINC*               | 40               | 54                  | 2160                       |
| 1-1/2" GALV.               | 40               | 55                  | 2200                       |
| 1-1/2" ZINC*               | 40               | 61                  | 2440                       |


30 PCS/CRTN – 300 FT/CRTN

STANDARD G60 COATING. G90 AVAILABLE UPON REQUEST.

\*Special orders only. Minimum quantities apply.

\*\*Pallet weights may vary.

## J METAL

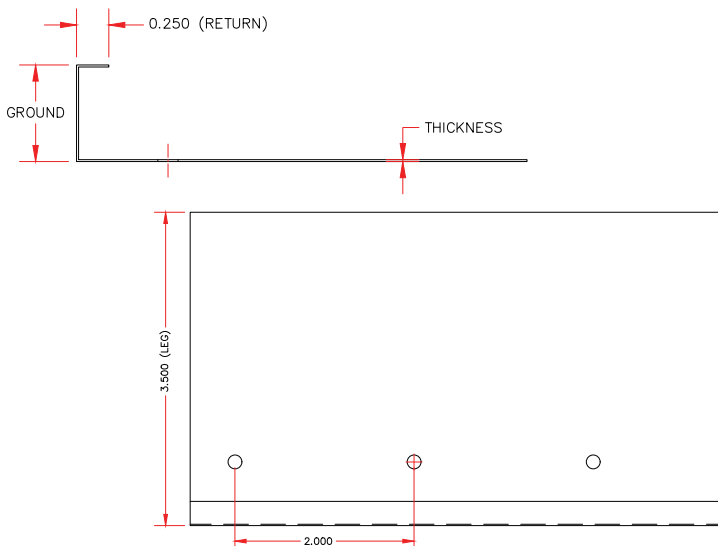

The choice where longer, solid flanges are preferable.  
Also available with punched grounds (J-Weep).

| J METAL | CRTNS/<br>PALLET | NOMINAL<br>LBS/CRTN | NOMINAL<br>WT/<br>PALLET* |
|---------|------------------|---------------------|---------------------------|
| 3/8"    | 42               | 67                  | 2814                      |
| 1/2"    | 42               | 75                  | 3150                      |
| 5/8"    | 42               | 78                  | 3276                      |
| 3/4"    | 42               | 78                  | 3276                      |
| 7/8"    | 42               | 81                  | 3402                      |
| 1"      | 42               | 82                  | 3444                      |
| 1-3/8"  | 40               | 86                  | 3440                      |
| 1-1/2"  | 40               | 86                  | 3440                      |

30 PCS/CRTN – 300 FT/CRTN


STANDARD G60 COATING. G90 AVAILABLE UPON REQUEST.

\*Special order only. Minimum quantities apply.



# Expansion Control Joints

## DOUBLE 'V' EXPANSION CONTROL JOINT

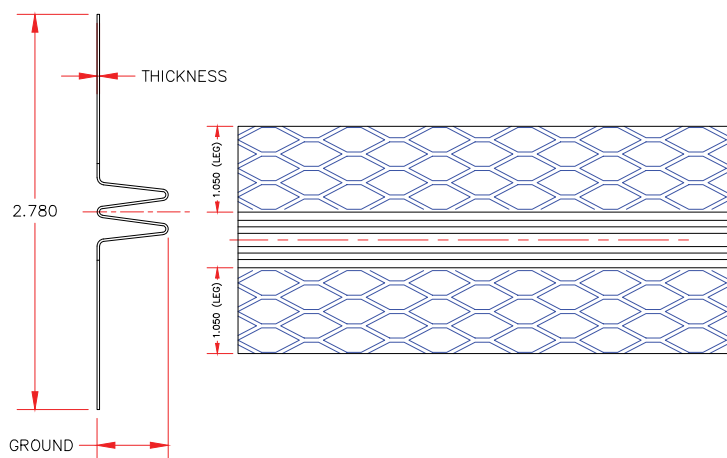

Niles Double 'V' Expansion Control Joints are used to provide mechanism for movement to accommodate expansion and contraction caused by initial stucco shrinkage and minor thermal movement.


| DOUBLE 'V' EXPANSION CONTROL JOINT | CRTNS/<br>PALLET | NOMINAL<br>LBS/CRTN | NOMINAL<br>WT/<br>PALLET* |
|------------------------------------|------------------|---------------------|---------------------------|
| 1/4" GALV.<br>1/4" ZINC            | 42<br>42         | 37<br>39            | 1544<br>1638              |
| 3/8" GALV.<br>3/8" ZINC            | 42<br>42         | 37<br>39            | 1554<br>1638              |
| 1/2" GALV.<br>1/2" ZINC            | 40<br>40         | 52<br>54            | 2080<br>2160              |
| 5/8" GALV.<br>5/8" ZINC            | 40<br>40         | 55<br>57            | 2200<br>2280              |
| 3/4" GALV.<br>3/4" ZINC            | 40<br>40         | 68<br>71            | 2720<br>2840              |
| 7/8" GALV.<br>7/8" ZINC            | 40<br>40         | 70<br>72            | 2800<br>2880              |

24 PCS/CRTN - 240 FT/CRTN

STANDARD G60 COATING. G90 AVAILABLE UPON REQUEST.

\*Pallet weights may vary.

## NILES DOUBLE 'V' INSIDE CORNER EXPANSION CONTROL JOINT

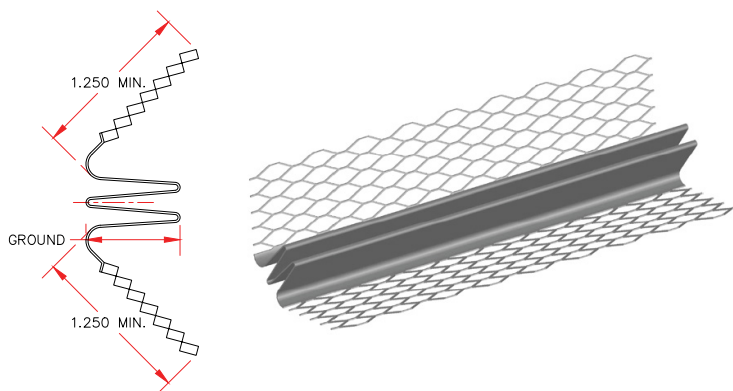

Similar to the standard Double 'V', Niles Double 'V' Inside Corner Expansion Control Joint is roll formed to fit inside corner locations.

| DOUBLE 'V' INSIDE CORNER EXPANSION CONTROL JOINT | CRTNS/<br>PALLET | NOMINAL<br>LBS/CRTN | NOMINAL<br>WT/<br>PALLET* |
|--------------------------------------------------|------------------|---------------------|---------------------------|
| 1/2" GALV.<br>1/2" ZINC                          | 40<br>40         | 52<br>54            | 2080<br>2160              |
| 5/8" GALV.<br>5/8" ZINC                          | 40<br>40         | 55<br>57            | 2200<br>2280              |
| 3/4" GALV.<br>3/4" ZINC                          | 40<br>40         | 68<br>71            | 2720<br>2840              |
| 7/8" GALV.<br>7/8" ZINC                          | 40<br>40         | 70<br>72            | 2800<br>2880              |

24 PCS/CRTN - 240 FT/CRTN


STANDARD G60 COATING. G90 AVAILABLE UPON REQUEST.

\*Pallet weights may vary.



# Expansion Control Joints con't

## NILES DOUBLE 'J' EXPANSION CONTROL JOINT

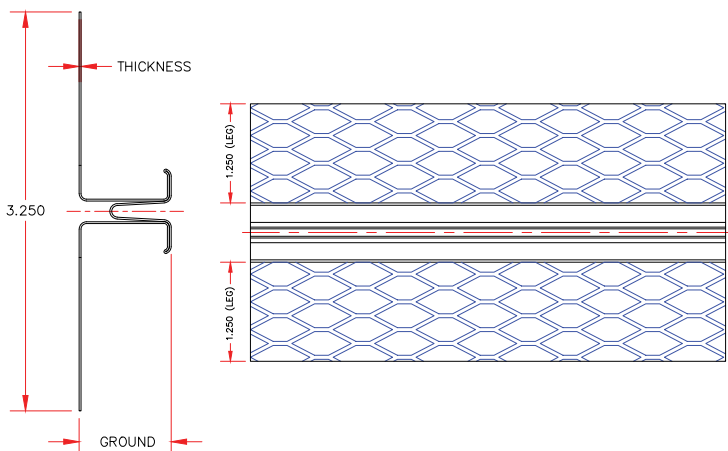

Like the Double 'V', the Double 'J' is also used to provide a mechanism for movement to accommodate expansion and contraction caused by initial stucco shrinkage and minor thermal movement. The Double 'J'-shaped shoulders provide a more secure stucco bond. Comes pre-taped to ensure a clean finish.

| DOUBLE 'J' EXPANSION CONTROL JOINT | CRTNS/ PALLET | NOMINAL LBS/CRTN | NOMINAL WT/ PALLET** |
|------------------------------------|---------------|------------------|----------------------|
| 1/2" GALV.                         | 40            | 68               | 2720                 |
| 1/2" ZINC*                         | 40            | 71               | 2840                 |
| 3/4" GALV.                         | 40            | 69               | 2760                 |
| 3/4" ZINC*                         | 40            | 72               | 2880                 |
| 7/8" GALV.                         | 40            | 80               | 3200                 |
| 7/8" ZINC*                         | 40            | 79               | 3160                 |


24 PCS/CRTN – 240 FT/CRTN

STANDARD G60 COATING. G90 AVAILABLE UPON REQUEST.

\*Special order only. Minimum quantities apply.

\*\*Pallet weights may vary.

## NILES ZINC CONTROL JOINT

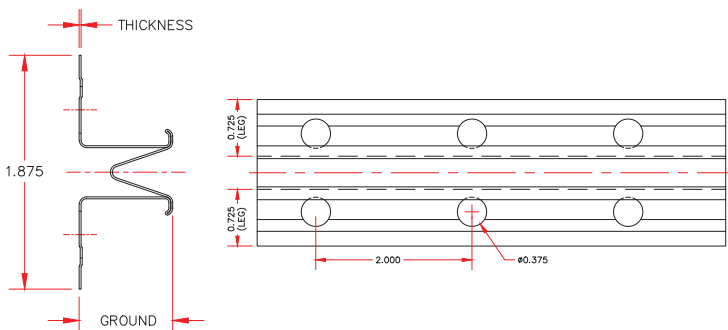

Niles Zinc Control Joint is used to provide a mechanism for movement to accommodate expansion and contraction caused by initial stucco shrinkage and minor thermal movement. The 'J'-shaped shoulder provides excellent stucco bonding.

| NILES ZINC CONTROL JOINT | CRTNS/ PALLET | NOMINAL LBS/CRTN | NOMINAL WT/ PALLET* |
|--------------------------|---------------|------------------|---------------------|
| C380 - 3/8"              | 20            | 63               | 1260                |
| C500 - 1/2"              | 20            | 65               | 1300                |
| C750 - 3/4"              | 20            | 75               | 1500                |


25 PCS/CRTN – 250 FT/CRTN

\*Pallet weights may vary.



# Expansion Control Joints con't

## NILES TWO-PIECE TRU-JOINT

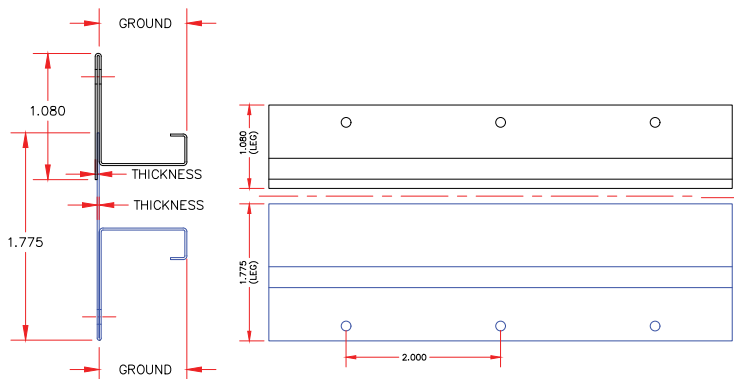

The Niles Two-Piece Tru-Joint is used to relieve stress caused by expansion and contraction and initial stucco shrinkage. The opening adjusts from 1/4" to 5/8" and is ideally used where more movement is expected than would be normal with a one-piece expansion control joint.


| NILES TWO-PIECE TRU JOINT | CRTNS/PALLET | NOMINAL LBS/CRTN | NOMINAL WT/PALLET* |
|---------------------------|--------------|------------------|--------------------|
| 1/2" GALV.                | 25           | 64               | 1600               |
| 1/2" ZINC                 | 25           | 66               | 1650               |
| 3/4" GALV.                | 25           | 68               | 1700               |
| 3/4" ZINC                 | 25           | 67               | 1675               |
| 7/8" GALV.                | 25           | 72               | 1800               |
| 7/8" ZINC                 | 25           | 71               | 1775               |

15 PCS/CRTN – 150 FT/CRTN

STANDARD G60 COATING. G90 AVAILABLE UPON REQUEST.

\*Pallet weights may vary.

## M-SLIDE TWO-PIECE EXPANSION JOINT

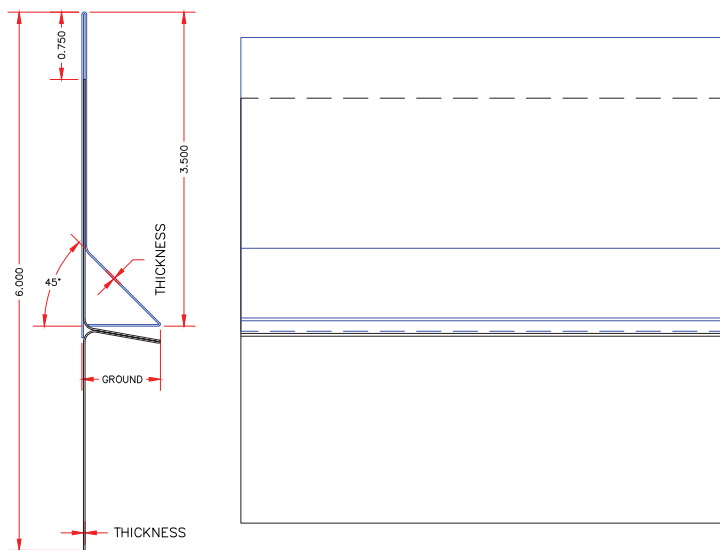

| M-SLIDE TWO-PIECE EXPANSION JOINT | PCS/CRTN | LBS/CRTN |
|-----------------------------------|----------|----------|
| 7/8"                              | 10       | 50       |

100 FT/CRTN



The M-Slide Two-Piece Expansion Joint is manufactured for applications where movement is anticipated. The two-piece design allows for 1-inch vertical movement while allowing water to egress from the wall.

Manufactured from G-90 coated material.



# Miscellaneous Accessories

## NILES CORNERITE

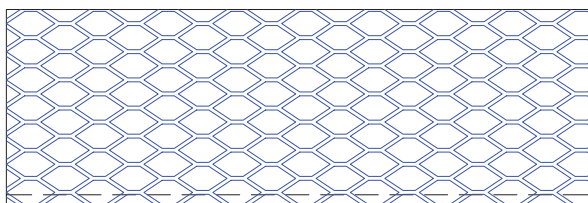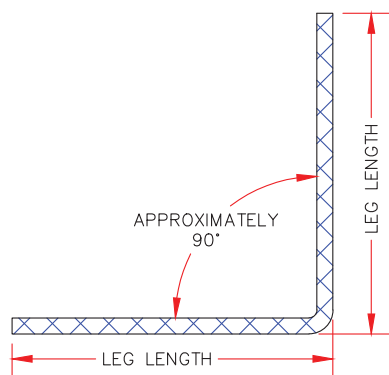


Used to reinforce and straighten inside metal lath installations to provide strength and smoothness to this critical area.

| NILES CORNERITE | PCS/ CRTN | FT/ CRTN | CRTNS/ PALLET | NOMINAL LBS/CRTN | NOMINAL WT/ PALLET* |
|-----------------|-----------|----------|---------------|------------------|---------------------|
| 2" GALV. 4'     | 150       | 600'     | 18            | 57               | 1026                |
| 2" GALV. 8'     | 75        | 600'     | 18            | 57               | 1026                |
| 3" GALV. 8'     | 75        | 600'     | 18            | 76               | 1368                |

STANDARD G60 COATING. G90 AVAILABLE UPON REQUEST.

\*Pallet weights may vary.

## NILES STRIP LATH

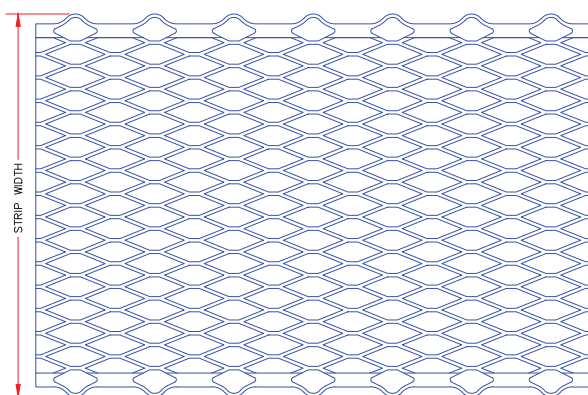


| NILES STRIP LATH | PCS/ CRTN | FT/ CRTN | CRTNS/ PALLET | NOMINAL LBS/CRTN | NOMINAL WT/ PALLET* |
|------------------|-----------|----------|---------------|------------------|---------------------|
| 4" GALV. 8'      | 75        | 600'     | 18            | 56               | 1008                |
| 6" GALV. 8'      | 75        | 600'     | 18            | 76               | 1368                |

STANDARD G60 COATING. G90 AVAILABLE UPON REQUEST.

\*Pallet weights may vary.

# Metal Lath

## FLAT LATH

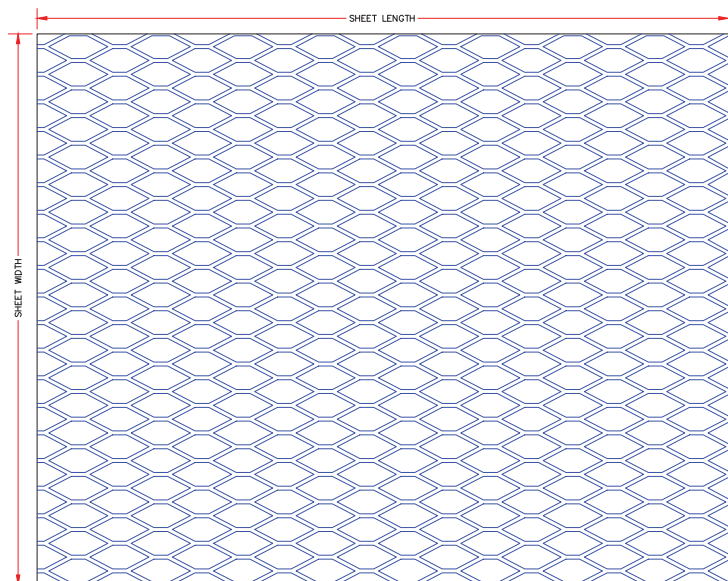


| WEIGHT/<br>SQ YD | SHEET<br>SIZE | PCS/<br>BN DL | BNDLS/<br>PALLET |
|------------------|---------------|---------------|------------------|
| 2.5              | 27" x 97"     | 10            | 50               |
| 3.4              | 27" x 97"     | 10            | 50               |

1000 SQ YDS/PALLET  
STANDARD G60 COATING. G90 AVAILABLE UPON REQUEST.  
1.75 LATH ALSO AVAILABLE, PLEASE CALL FOR DETAILS.

The Niles Diamond Mesh Flat Lath is a versatile metal lath ideal as a plaster base and reinforcement for all type of walls, ceilings, ornamental figures and fireproofing of steel beams and columns.

## DIMPLED LATH

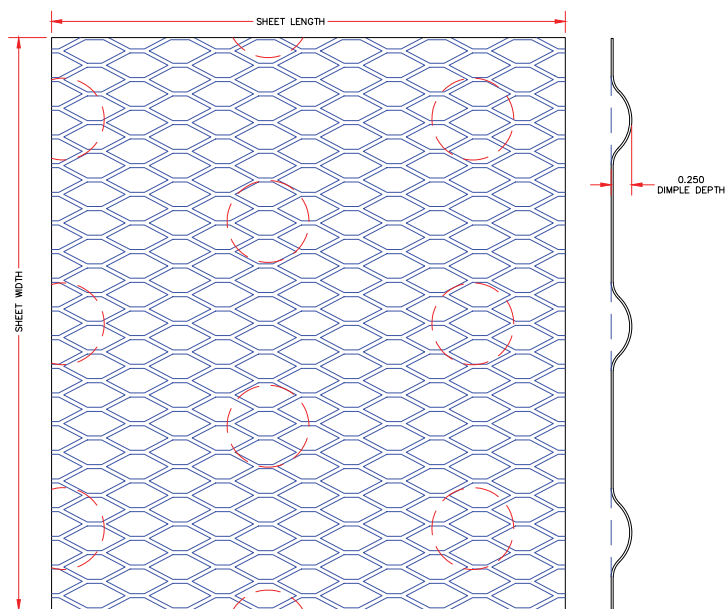


| WEIGHT/<br>SQ YD | SHEET<br>SIZE | PCS/<br>BN DL | BNDLS/<br>PALLET |
|------------------|---------------|---------------|------------------|
| 2.5              | 27" x 97"     | 10            | 25               |
| 3.4              | 27" x 97"     | 10            | 25               |

500 SQ YDS/PALLET  
STANDARD G60 COATING. G90 AVAILABLE UPON REQUEST.  
1.75 LATH ALSO AVAILABLE, PLEASE CALL FOR DETAILS.

The Niles Dimpled Lath provides a 1/4" indentation in the metal lath to hold away from the sheathing base and reinforcement (plaster embedment) for all types of walls and fireproofing of steel beam and columns. Provides ample keying for scratch coat and is commonly used for plaster machine application.



## V-GROOVE LATH

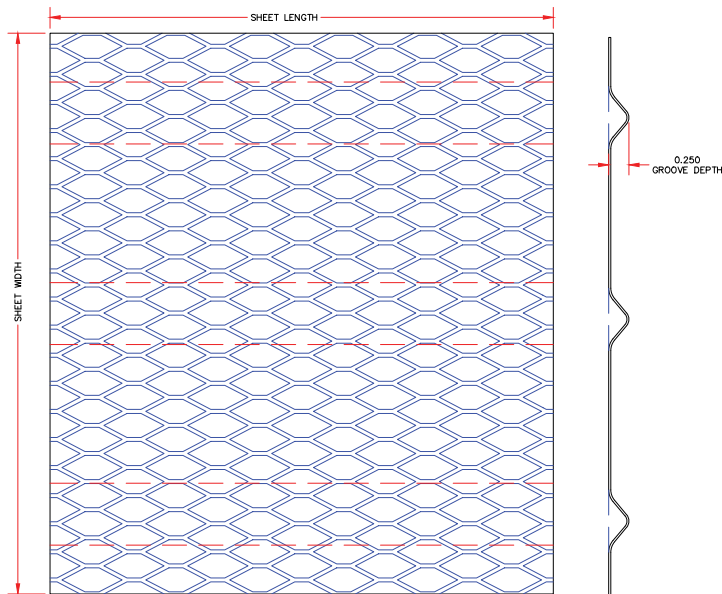


| WEIGHT/<br>SQ YD | SHEET<br>SIZE | PCS/<br>BNDL | BNDLS/<br>PALLET |
|------------------|---------------|--------------|------------------|
| 2.5              | 27" x 97"     | 10           | 25               |
| 3.4              | 27" x 97"     | 10           | 25               |

500 SQ YDS/PALLET

STANDARD G60 COATING. G90 AVAILABLE UPON REQUEST.

The Niles V-Groove Metal Lath, provides a 1/4" V-Groove indentation running the length of the metal lath, furring the lath away from the sheathing base. There are six grooves on each sheet to provide ample keying for scratch coat applications.

## PAPER BACK LATH

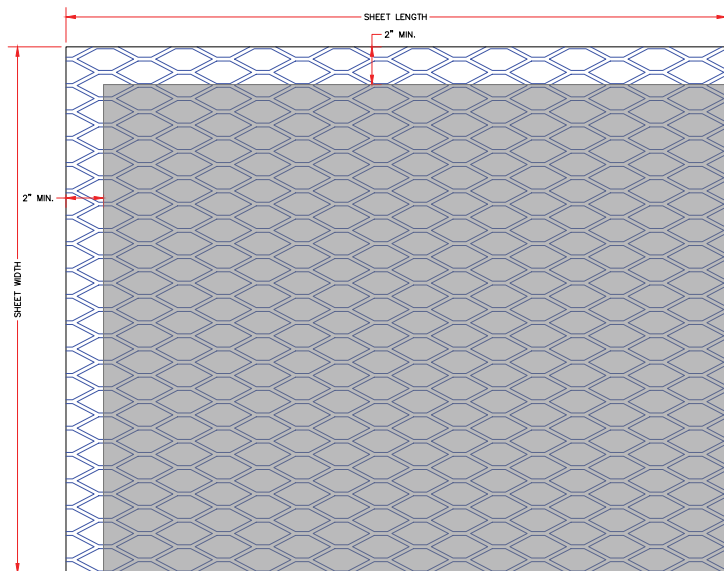

| WEIGHT/<br>SQ YD | SHEET<br>SIZE | PCS/<br>BNDL | BNDLS/<br>PALLET |
|------------------|---------------|--------------|------------------|
| 2.5*             | 27" x 97"     | 10           | 25               |
| 3.4*             | 27" x 97"     | 10           | 25               |

500 SQ YDS/PALLET

STANDARD G60 COATING. G90 AVAILABLE UPON REQUEST.


\*Weight per square yard does not include paper.

The Niles Paper Back Lath is fully backed with Type-1, Grade 'D', Style-2 asphalt paper that meets or exceeds federal specifications NO. UU-B-790A. Paper is offset for easier lapping.

Available in Flat, Dimpled and V-Groove.



## 3/8" HI-RIB LATH

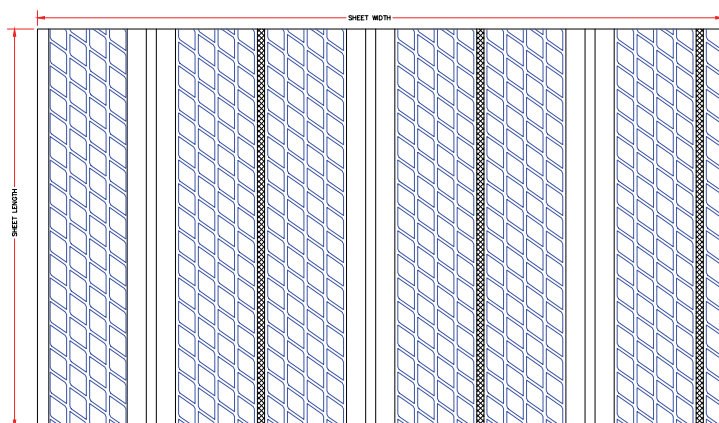


The most rigid of all metal laths; manufactured with 3/8" rib running lengthwise and a 1/8" rib between them. The Hi-Rib Lath is able to span up to 24" on center. Ideal for both vertical and horizontal applications.

| WEIGHT/<br>SQ YD | SHEET<br>SIZE | PCS/<br>BNDL | BNDLS/<br>PALLET |
|------------------|---------------|--------------|------------------|
| 3.4              | 27" x 97"     | 10           | 50               |

1000 SQ YDS/PALLET

## ZINC LATH

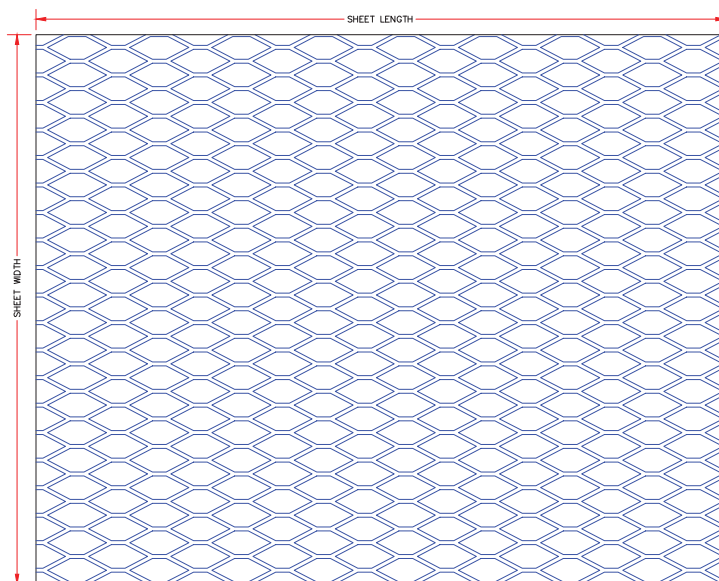

| WEIGHT/<br>SQ YD | SHEET<br>SIZE | PCS/<br>BNDL | BNDLS/<br>PALLET |
|------------------|---------------|--------------|------------------|
| 2.5              | 27" x 97"     | 10           | 25               |
| 3.4              | 27" x 97"     | 10           | 25               |

500 SQ YDS/PALLET


The Niles Zinc Metal Lath provides better corrosion resistance for both specialty and conventional stucco applications. Well suited for coastal applications where salt water and moisture are a concern.

Available in Self-Furring and Paperback, call plant for details.



# Plaster/Drywall Accessories

## NILES MINI-BEAD 800/900

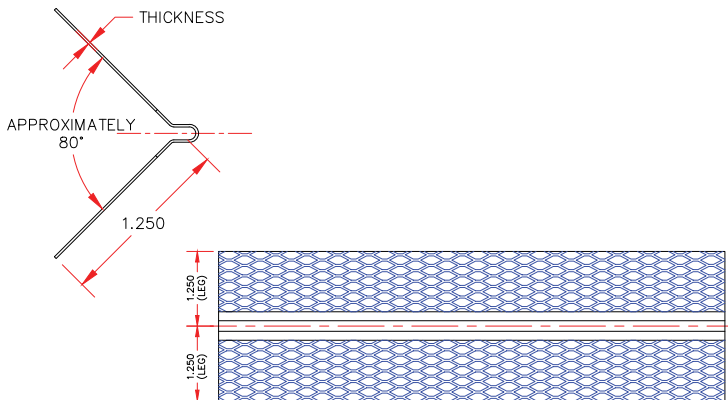

Wing size 1-1/4" x 1-1/4". Used to provide a straight and true reinforced corner for veneer plaster and drywall applications. Manufactured from hot-dipped galvanized steel, these beads can be nailed, stapled or clinched. The fine mini-mesh flanges allow for excellent bonding to veneer plaster or drywall finishing compound. Available in 8' and 10' lengths.

| NILES MINI-BEAD 800/900 | CRTNS/<br>PALLET | NOMINAL<br>LBS/<br>CRTN | NOMINAL<br>WT/<br>PALLET* |
|-------------------------|------------------|-------------------------|---------------------------|
| MINI-BEAD 8'            | 25               | 44                      | 1100                      |
| MINI-BEAD 9'            | 25               | 52                      | 1300                      |
| MINI-BEAD 10'           | 25               | 54                      | 1350                      |

8' Corner Bead 60 PCS/CRTN – 480 FT/CRTN


9' Corner Bead 60 PCS/CRTN – 540 FT/CRTN

10' Corner Bead 60 PCS/CRTN – 600 FT/CRTN

STANDARD G40 COATING

\*Pallet weights may vary.

## NILES 'L'-TRIM & NILES 'J'-TRIM

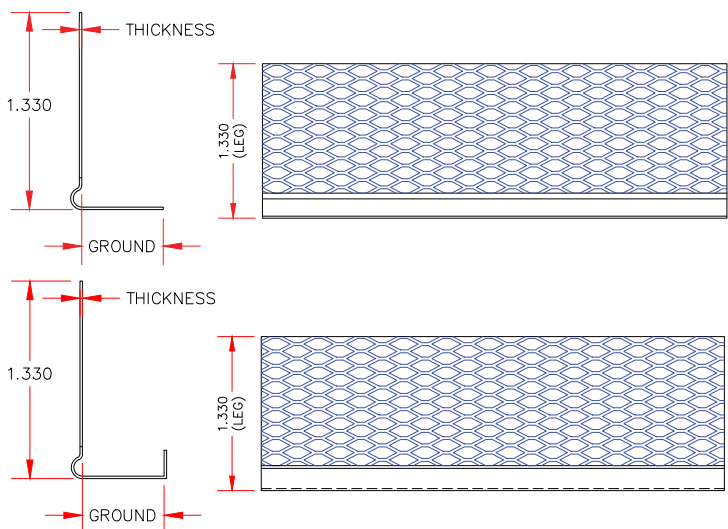

| NILES 'L' & 'J' TRIMS                | CRTNS/<br>PALLET | NOMINAL<br>LBS/<br>CRTN | NOMINAL<br>WT/<br>PALLET* |
|--------------------------------------|------------------|-------------------------|---------------------------|
| Niles 'L'-Trims<br>1/2" & 5/8" – 10' | 60               | 45                      | 2700                      |
| Niles 'J'-Trims<br>1/2" & 5/8" – 10' | 63               | 49                      | 3087                      |

50 PCS/CRTN – 500 FT/CRTN

STANDARD G40 COATING


\*Pallet weights may vary.

Niles 'L'-Trim is used to provide a protective edge for either drywall or veneer gypsum board and plaster, or for gypsum finish edges. It provides a fine mini-mesh flange for bonding of veneer plaster or gypsum finishing compound.

Niles 'J'-Trim is similar to our 'L'-Trim, but with a return lip to provide a complete protective edge around the gypsum board.



## NILES 093 ZINC CONTROL JOINT

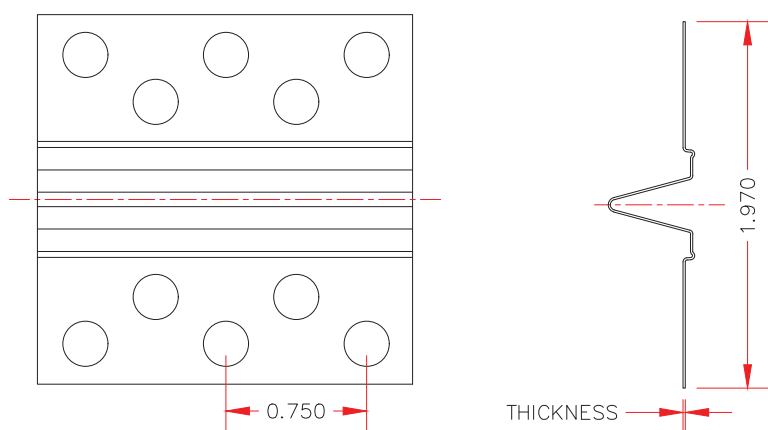

| CRTNS/<br>PALLET | NOMINAL<br>LBS/CRTN | NOMINAL<br>WT/<br>PALLET* |
|------------------|---------------------|---------------------------|
| 20               | 32                  | 640                       |

25 PCS/CRTN – 250 FT/CRTN

\*Pallet weights may vary.


Niles 093 Zinc Control Joints are used for large expanses of ceiling and wall areas, both drywall and veneer. Excellent for large partitions and from door headers to ceilings. Tape protects 1/4" openings, 7/16" deep; 3/32" grounds.

Note: A sure seal behind joints must be placed where fire ratings are observed and sound transmissions are a factor.



# Drywall Framing Accessories

## NILES DRYWALL CORNER BEAD

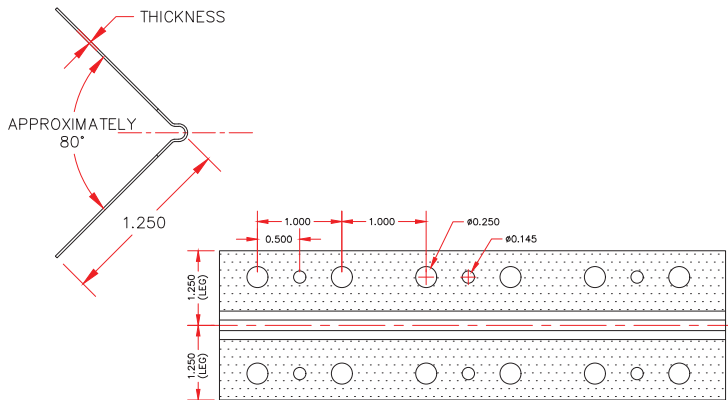


Niles Building Products' Drywall Corner Bead is an extremely durable, hot-dipped galvanized bead that provides superior corrosion protection. Flanges are deeply knurled for excellent joint compound adhesion. Ideal for high traffic areas, this drywall finishing corner bead is easily installed by using drywall nails, staples, screws or clinching tool.

| LENGTH | PCS/CRTN | FT/CRTN | CRTNS/<br>PALLET |
|--------|----------|---------|------------------|
| 8"     | 63       | 504     | 49               |
| 9"     | 56       | 504     | 49               |
| 10"    | 50       | 500     | 49               |
| 12"    | 42       | 504     | 49               |

NOMINAL WEIGHT/CRTN - 56 LBS, NOMINAL  
WEIGHT/PALLET - 2744 LBS  
STANDARD G40 COATING

## NILES RESILIENT CHANNEL

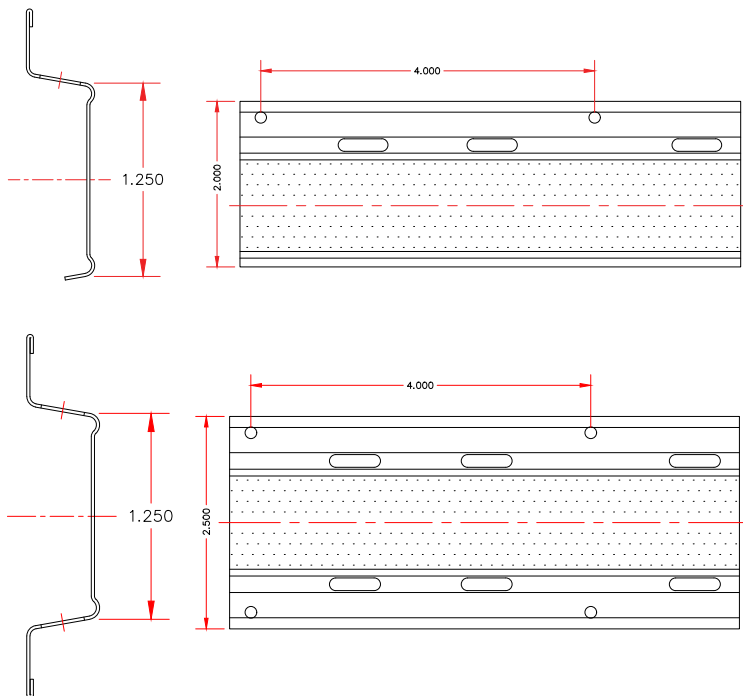


| NILES<br>RESILIENT<br>CHANNEL | SIZE             | LENGTH | PCS/<br>BNL |
|-------------------------------|------------------|--------|-------------|
| RC-1 ONE LEG,<br>25 GAUGE     | 1/2" x 2"        | 12'    | 20          |
| RC-2 TWO LEGS,<br>25 GAUGE    | 1/2" x<br>2-1/2" | 12'    | 20          |

50 BNDLS/PALLET  
STANDARD G40 COATING

Niles Resilient Channel reduces transmission of airborne sound through partition and ceiling assemblies. The resilient channel dampens sound waves effectively, dissipating the energy and reducing sound transmission.



## NILES FURRING CHANNEL

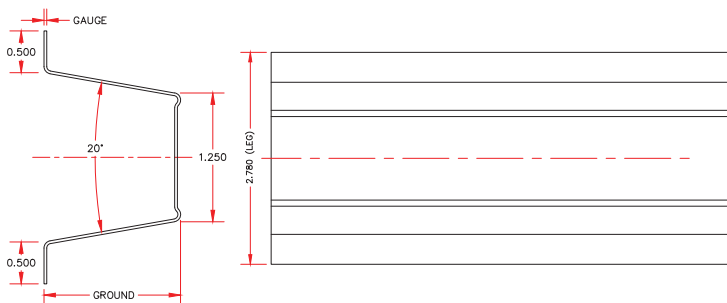


Available in two sizes, the Niles Furring Channel is used as a cross furring member for attachment of gypsum wallboard or lath on ceilings or furred masonry walls.

| SIZE            | GAUGE | LENGTH    | PCS/BNDL |
|-----------------|-------|-----------|----------|
| 7/8" x 2-1/2"   | 25    | 10' & 12' | 10       |
| 7/8" x 2-1/2"   | 20    | 10' & 12' | 10       |
| 1-1/2" x 2-3/4" | 25    | 10' & 12' | 10       |
| 1-1/2" x 2-3/4" | 20    | 10' & 12' | 10       |

50 BNDLS/PALLET  
STANDARD G40 COATING

## U-CHANNEL CRC (COLD ROLLED CHANNEL)

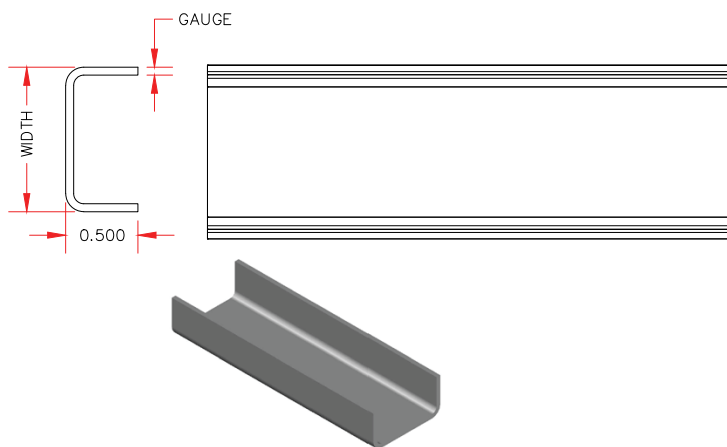

| SIZE   | LENGTH | PCS/BNDL | WEIGHT/BNDL | WEIGHT/PALLET* |
|--------|--------|----------|-------------|----------------|
| 3/4"   | 10'    | 20       | 50 lbs      | 1000 lbs       |
| 3/4"   | 16'    | 20       | 80 lbs      | 1600 lbs       |
| 1-1/2" | 10'    | 10       | 45 lbs      | 900 lbs        |
| 1-1/2" | 16'    | 10       | 75 lbs      | 1500 lbs       |

20 BNDLS/PALLET  
\*Pallet weights may vary



**Available in 16 gauge.**

U-Channel CRC (Cold Rolled Channel) is most commonly used as a bridging method to provide bracing in metal framing systems.

Note: Cold Rolled Channel will not provide adequate bracing if not properly attached to the framing member.



## NILES FLAT STOCK

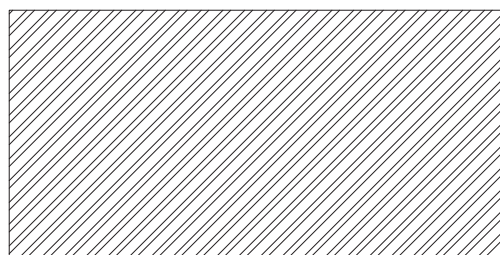
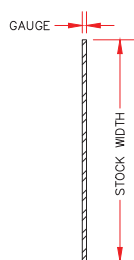


Flat strapping is used for lateral bracing, joist bridging and diagonal bracing to prevent racking.

| SIZE       | GA (MIL) | COATING | MIN. YIELD STRENGTH | PCS/ BNDL | BNDLS/ PALLET |
|------------|----------|---------|---------------------|-----------|---------------|
| 2", 4", 6" | 25 (18)  | G40     | 33ksi               | 10        | 20            |
| 2", 4", 6" | 20 (30)  | G40     | 33ksi               | 10        | 20            |
| 2", 4", 6" | 20 (33)  | G60     | 33ksi               | 5         | 40            |
| 2", 4", 6" | 18 (43)  | G60     | 33ksi               | 5         | 40            |
| 2", 4", 6" | 16 (54)  | G60     | 50ksi               | 5         | 40            |

10' Lengths  
200 PCS/PALLET

## NILES CORNER ANGLE

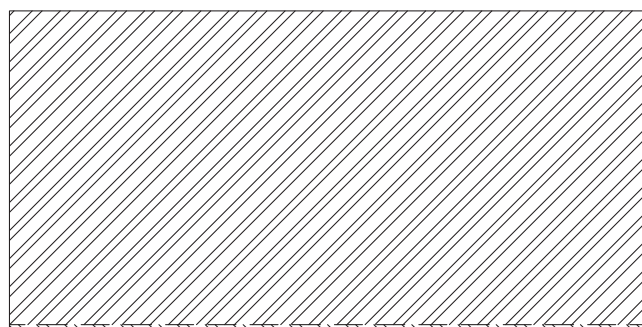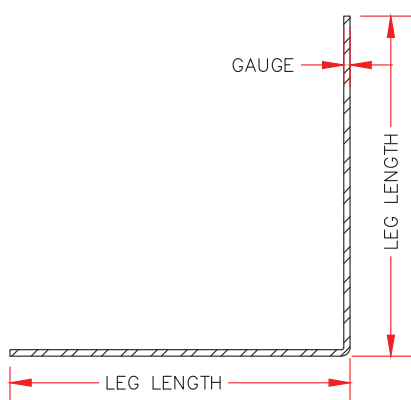

Niles Corner Angle is produced for miscellaneous attachments of intersecting framing components and right angle corner enclosures.


| SIZE           | GA (MIL) | COATING | MIN. YIELD STRENGTH | PCS/ BNDL | PCS/ PALLET |
|----------------|----------|---------|---------------------|-----------|-------------|
| 1-1/2", 2", 3" | 25 (18)  | G40     | 33ksi               | 10        | 500         |
| 1-1/2", 2", 3" | 20 (30)  | G40     | 33ksi               | 10        | 500         |
| 1-1/2", 2", 3" | 20 (33)  | G40     | 33ksi               | 5         | 250         |
| 1-1/2", 2", 3" | 18 (43)  | G60     | 33ksi               | 5         | 250         |
| 1-1/2", 2", 3" | 16 (54)  | G60     | 50ksi               | 5         | 250         |

10' Lengths  
50 BNDLS/PALLET



# Security Panels

## EXPANDED METAL SECURITY PANEL

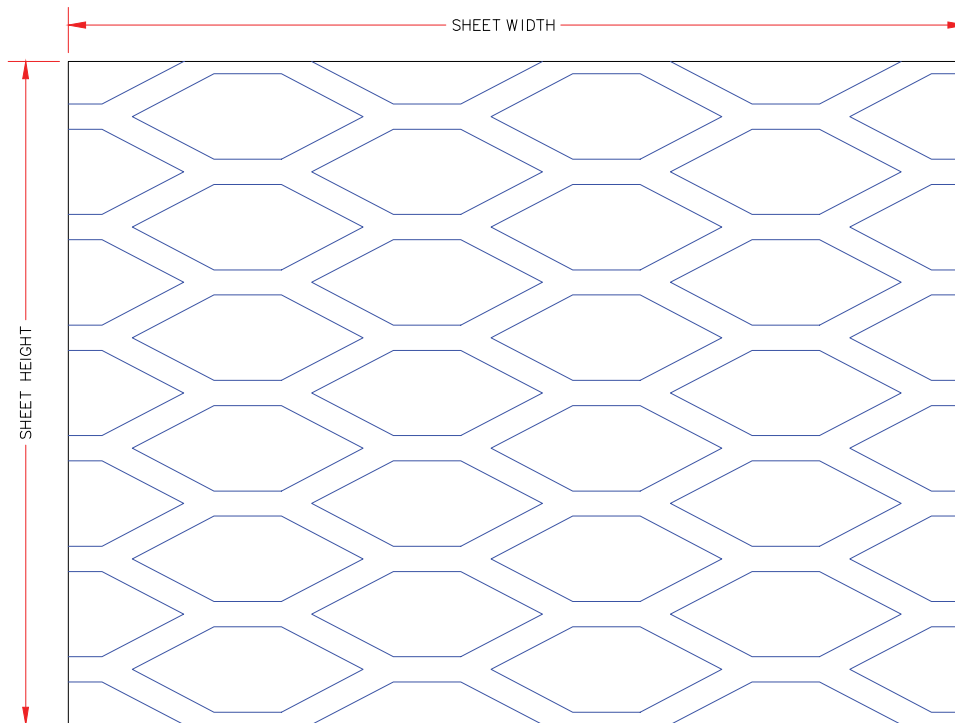

| SIZE           | WEIGHT/<br>SHEET |
|----------------|------------------|
| 1/2" - #18     | 21 lbs           |
| 1/2" - #16     | 26 lbs           |
| 1/2" - #13     | 39 lbs           |
| 3/4" - #16     | 19 lbs           |
| 3/4" - #13     | 28 lbs           |
| 3/4" - #9      | 62 lbs           |
| 3/4" - #9 HLSM | 77 lbs           |
| 1-1/2" - #16   | 15 lbs           |
| 1-1/2" - #13   | 21lbs            |
| 1-1/2" - #9    | 40 lbs           |

The Expanded Metal Security Panel is used to provide strength and security to interior partitions, floors and ceilings. Standard expanded panels are attached to framing with Security Clips and create a steel barrier behind the finished drywall.

Product features and benefits include:


- can be used accommodate all wall heights and configurations
- attaches easily to all framing and joists
- used in banks, panic rooms, retail stores and government buildings
- available in Uncoated, Galvanized or Stainless Steel

Sheet size 48" x 96".

Available in Standard and Flattened. Security Clips are used to attach panels quickly and easily to framing and joists. Security Clips sold 300 PCS/BOX.

# Stainless Steel Products

## NILES STAINLESS STEEL FLAT LATH

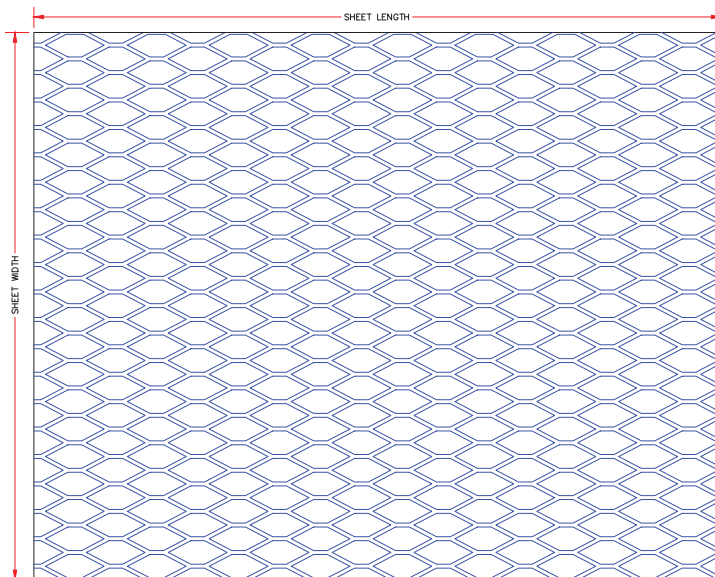


| WEIGHT/<br>SQ YD | STAINLESS<br>STEEL TYPE | SHEET<br>SIZE | SHEETS/<br>BNDL |
|------------------|-------------------------|---------------|-----------------|
| 2.5              | 304/316                 | 27" x 97"     | 10              |
| 3.4              | 304/316                 | 27" x 97"     | 10              |

The Niles Stainless Steel Flat Lath is a versatile metal lath ideal as a plaster base and reinforcement for all types of walls, ceilings, ornamental figures and fireproofing of steel beams and columns.

Also available in Dimpled.

## NILES STAINLESS STEEL 1-A CORNER BEAD

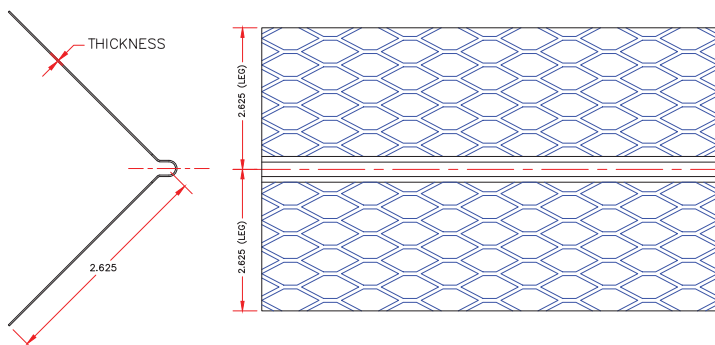


| NILES STAINLESS<br>STEEL NO. 1-A<br>CORNER BEAD | STAINLESS<br>STEEL TYPE | PCS/<br>CRTN |
|-------------------------------------------------|-------------------------|--------------|
| 10'                                             | 304 or 316              | 30           |

300 FT/CRTN

The Niles Stainless Steel 1-A Corner Bead is used to reinforce external corners in Portland cement stucco applications.



## NILES STAINLESS STEEL NO. 66X CASING BEAD

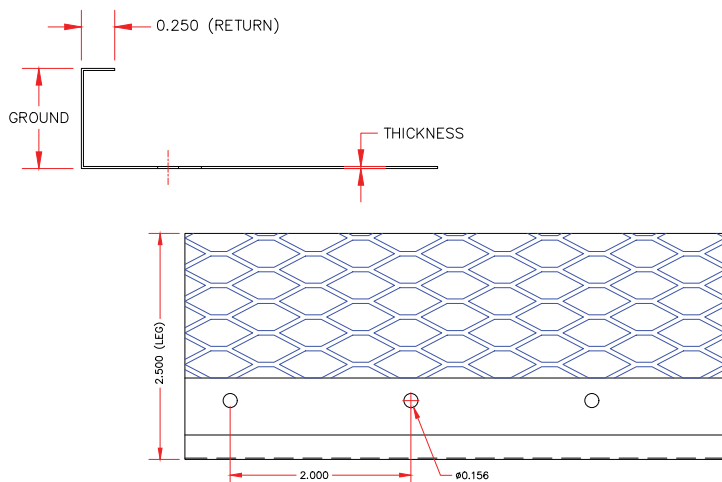


The Niles Stainless Steel No. 66X Casing Bead is used to effectively terminate plaster edge and/or to separate stucco from all other structural membranes at doors, windows and other openings.

| NILES<br>STAINLESS<br>STEEL NO. 66X<br>EXPANDED<br>FLANGE | STAINLESS<br>STEEL TYPE | PCS/<br>CRTN |
|-----------------------------------------------------------|-------------------------|--------------|
| 1/2" & 3/4"                                               | 304 or 316              | 30           |

300 FT/CRTN

## NILES STAINLESS STEEL DOUBLE 'J' EXPANSION CONTROL JOINT

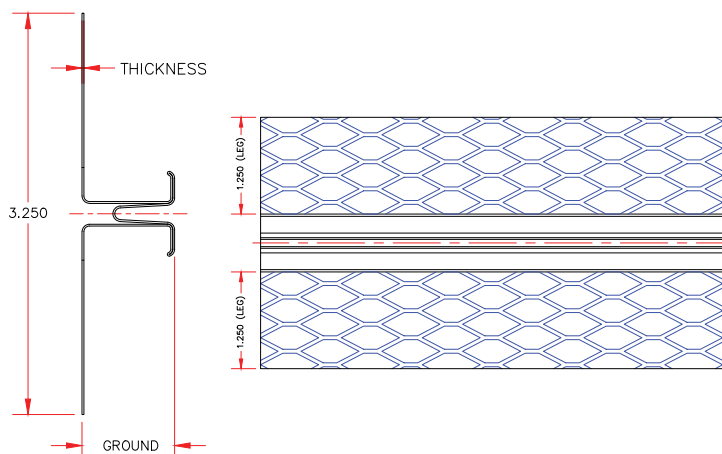


The Niles Stainless Steel Double 'J' Expansion Control Joint is used to provide mechanism for movement to accommodate expansion and contraction caused by initial stucco shrinkage and minor thermal movement.

| NILES<br>STAINLESS<br>STEEL<br>DOUBLE 'J'<br>EXPANSION<br>CONTROL JOINT | STAINLESS<br>STEEL TYPE | PCS/<br>CRTN |
|-------------------------------------------------------------------------|-------------------------|--------------|
| 1/2" & 3/4"                                                             | 304 or 316              | 24           |

240 FT/CRTN



## NILES STAINLESS STEEL DOUBLE 'V' EXPANSION CONTROL JOINT

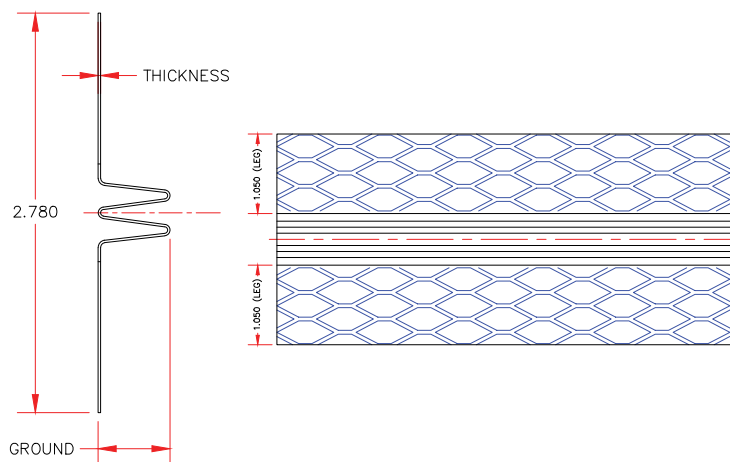


| NILES<br>STAINLESS<br>STEEL<br>DOUBLE 'V'<br>EXPANSION<br>CONTROL JOINT | STAINLESS<br>STEEL TYPE | PCS/<br>CRTN |
|-------------------------------------------------------------------------|-------------------------|--------------|
| 1/2" & 3/4"                                                             | 304 or 316              | 24           |

240 FT/CRTN

The Niles Stainless Steel Double 'V' Expansion Control Joint is used to provide a mechanism for movement to accommodate expansion and contraction caused by initial stucco shrinkage and minor thermal movement.

## NILES STAINLESS STEEL #7 FHA FOUNDATION WEEP SCREED

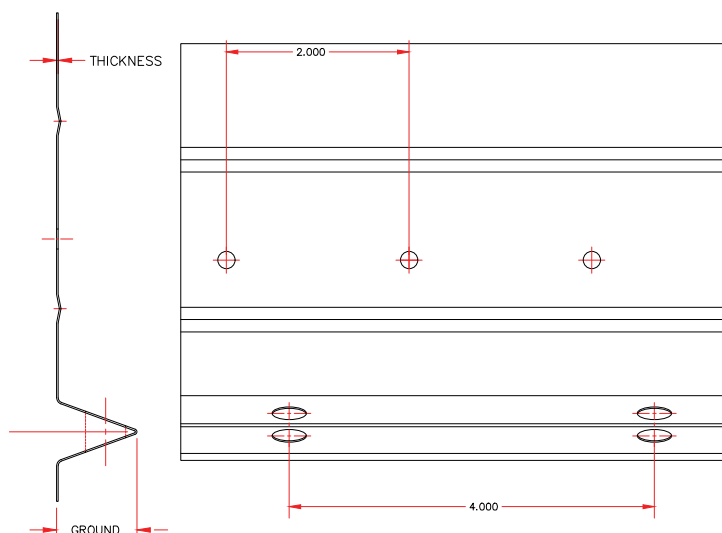

| NILES<br>STAINLESS<br>STEEL #7 FHA<br>FOUNDATION<br>WEEP SCREED | STAINLESS<br>STEEL TYPE | PCS/<br>CRTN |
|-----------------------------------------------------------------|-------------------------|--------------|
| 1/2" & 3/4"                                                     | 304 or 316              | 25           |

250 FT/CRTN

The Niles Stainless Steel #7 FHA Foundation Weep Screed is used to provide a weep mechanism as part of the drainage system as required at the bottom of all framed walls; by all major building codes and the International Building Code in ASTM C1063. The larger holes in the ground flange are bonding holes as the entire surface of the sloped ground provides for drainage once the stucco has hydrated and shrinkage has occurred.



# Specifications

## Metal Lath & Accessories

---

### HOT DIPPED GALVANIZED:

- ASTM A1003** Standard specification for steel sheet, carbon, metallic and nonmetallic-coated for cold-formed framing members
- ASTM A653** Standard specification for steel sheet zinc coated (galvanized) or zinc iron alloy coated (galvanized) by the hot-dip process
- ASTM C645** Standard specification for non-structural steel framing members
- ASTM C754** Standard specification for installation of steel framing members to receive screw-attached gypsum panel products
- ASTM C841** Standard specification for installation of interior lath and furring
- ASTM C847** Standard specification for metal lath (2.5 & 3.4 only)
- ASTM C1047** Standard specification for gypsum wallboard and gypsum veneer base accessories
- ASTM C1063** Standard specification for installation of lathing and furring for Portland cement based plaster
- ASTM C1861** Standard specification for lathing and furring accessories, and fasteners, for interior and exterior Portland cement based plaster
- All galvanized products produced from G60 hot-dipped galvanized raw material to meet full compliancy for your application needs.
  - Full line of G90 hot-dipped galvanized now available. This finish is intended for applications where superior corrosion resistance is required and cost is a consideration. Contact sales for details.

### ZINC:

- ASTM B69** Standard specification for flat rolled zinc. Approximately 99% pure zinc.

### PAPER:

Type 1, Grade "D", Style 2.  
Meets or exceeds federal specifications No. 44-B-790A

### STORAGE:

Per ASTM C1063, all metal lath and accessories must be protected from the elements during storage and at job sites.



