




“Specialists in Expanded Metal Building Products”

Niles 304 Stainless Steel Lath

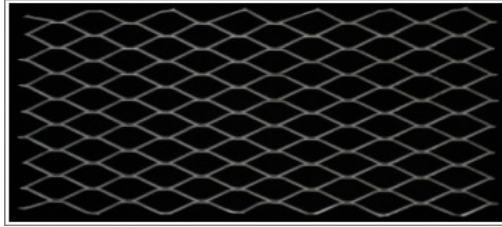

Reference Chart

Weight / sq. yard	Stainless Steel Types	Sheet size	Sheets/ bundle
2.5 lbs.	304	27" x 97"	10
3.4 lbs.	304	27" x 97"	10

Stainless Steel Lath is produced to meet **ASTM C847**, with the notable exception that the metal is comprised of stainless steel, and not galvanized carbon steel. Material is produced flat or self-furred.

Stainless Steel Lath can be used instead of standard metal lath, in the same manner as detailed in **ASTM C1063**.

Stainless Steel Lath is manufactured from Stainless Steel produced to **ASTM A240** standards.

Please note the following requirements and cautions:

Accessories that come in contact with the Stainless Steel Lath shall be either stainless steel or vinyl in order to avoid galvanic corrosion that occurs when dissimilar metals touch.

Fasteners: Stainless Steel Fasteners and washers are recommended for attachment of Stainless Steel Lath. Should standard galvanized fasteners be used, then to prevent standard galvanized fasteners from coming in contact with the Stainless Steel Lath, they are to be separated by washers made of plastic, neoprene or some other inert material. Consult with fastener manufacturer as to fastener recommendations.

Continuous Application: Provide isolation of standard galvanized Lath from Stainless Steel Lath if used in a continuous application.

NILES BUILDING PRODUCTS CO.
1600 Hunter Street, Niles, OH 44446
Phone: 800-323-3329 Fax: 330-544-8868
www.nilesbldg.com