
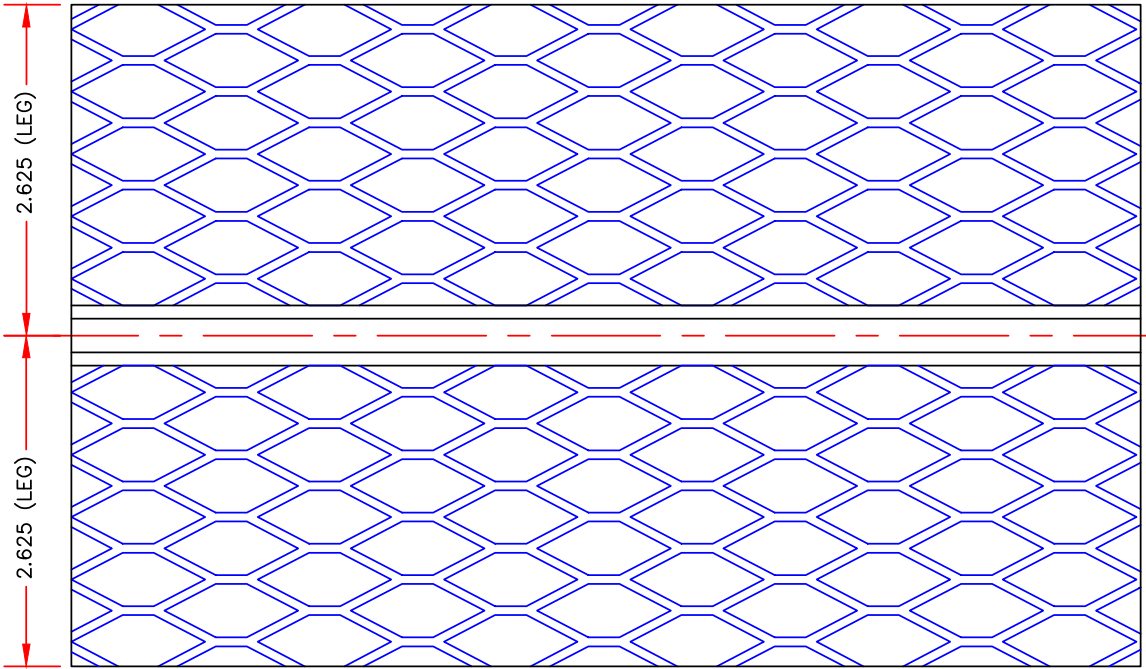


NILES STAINLESS STEEL 1-A CORNER BEAD

PART #	DEC. THICK	LENGTH	PCS/CRTN	FEET/CRTN	CRTNS/PALLET
6450102	0.017	10'	30	300'	40

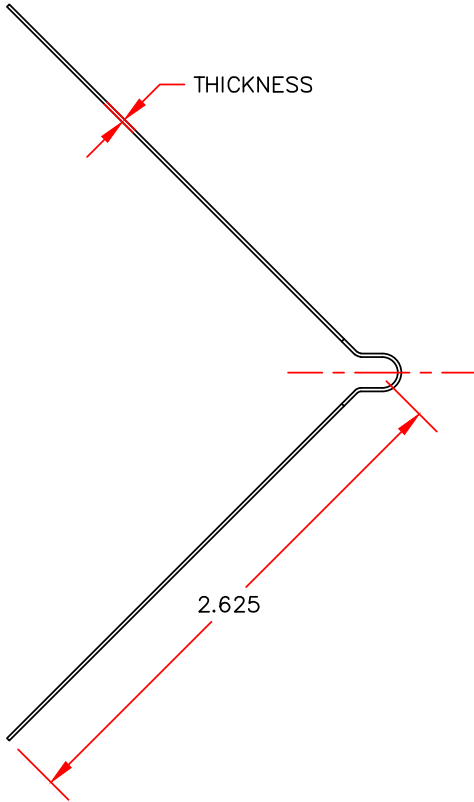

NILES BUILDING PRODUCTS CO.

Specialists in Metal and Vinyl Building Products

nilesbldg.com • 800-323-3329

MANUFACTURED TO MEET ASTM: C841, C1047, C1063, C1861

Niles Facility
 1600 Hunter Street
 Niles, OH 44446

Jacksonville Facility
 8441 Western Way
 Jacksonville, FL 32256

Dallas-Ft. Worth Facility
 2303 I-30 Frontage Road Ste 100
 Grand Prairie, TX 75050

NILES STAINLESS STEEL 1-A CORNER BEAD

The Niles Stainless Steel 1-A Corner Bead is used to reinforce external corners in Portland cement stucco applications. The 2 5/8" expanded flanges can easily be flexed over irregular or uneven corners, allow for complete embedment of the entire bead, especially near the nose where strength is needed most. The solid metal nose provides rigidity for straight corners.

Niles Stainless Steel 1-A Corner Bead is produced to meet ASTM C1063, with the notable exception that the metal is comprised of stainless steel, and not galvanized carbon steel. It is offered in Stainless Steel types 304 or 316.

Niles Stainless Steel 1-A Corner Bead is manufactured from Stainless Steel produced to ASTM A240 standards.

Niles Stainless Steel 1-A Corner Bead is manufactured with a 2 5/8" Wing.

Niles Stainless Steel 1-A Corner Bead can be used instead of standard metal 1-A Corner Bead, in the same manner as detailed in ASTM C1063.

Please note the following requirements and cautions:

Materials: Materials that come in contact with Niles Stainless Steel 1-A Corner Bead shall be either stainless steel or vinyl in order to avoid galvanic corrosion that occurs when dissimilar metals touch.

Fasteners: Stainless Steel Fasteners are recommended for attachment of Niles Stainless Steel 1-A Corner Bead. Should standard galvanized fasteners be used, then to prevent standard galvanized fasteners from coming in contact with the Niles Stainless 1-A Corner Bead, they are to be separated by washers made of plastic, neoprene or some other inert material. Consult with fastener manufacturer as to fastener recommendations.

Continuous Application: Provide isolation of standard galvanized Lath and Accessories from Stainless Steel Lath and Accessories if used in a continuous application.



NILES BUILDING PRODUCTS CO.

Specialists in Metal and Vinyl Building Products

nilesbldg.com • 800-323-3329

MANUFACTURED TO MEET ASTM: C841, C1047, C1063, C1861

Niles Facility
1600 Hunter Street
Niles, OH 44446

Jacksonville Facility
8441 Western Way
Jacksonville, FL 32256

Dallas-Ft. Worth Facility
2303 I-30 Frontage Road Ste 100
Grand Prairie, TX 75050