
NILES STAINLESS STEEL FLAT LATH WEIGHT / SHEET SHEET PART# WIDTH TYPE SQ.YD. LENGTH 27" 97" 0251304 2.5 304 0341304 27" 97" 3.4 304 0251316 2.5 27" 97" 316 0341316 3.4 27" 97" 316



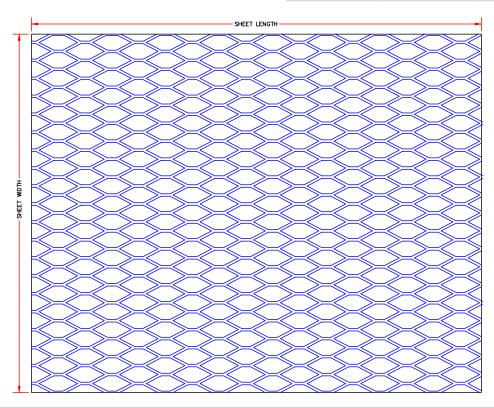

nilesbldg.com • 800-323-3329

MANUFACTURED TO MEET ASTM: C841,C847, C1063
Stainless Steel lath manufactured to ASTM C847 standards with the exception that Stainless Steel is being used instead of Galvanized Steel. Stainless Steel lath available in Type 304 or Type 316 material.

Niles Facility 1600 Hunter Street Niles, OH 44446

Jacksonville Facility 8441 Western Way Jacksonville, FL 32256 Dallas-Ft. Worth Facility 2303 I-30 Frontage Road Ste 100 Grand Prairie, TX 75050

NILES STAINLESS STEEL FLAT LATH

Niles Stainless Steel Lath is produced to meet ASTM C847, with the notable exception that the metal is comprised of stainless steel, and not galvanized carbon steel. Material is produced flat or self-furred.

Niles Stainless Steel Lath can be used instead of standard metal lath, in the same manner as detailed in ASTM C1063.

Niles Stainless Steel Lath is manufactured from Stainless Steel produced to ASTM A240 standards.

Please note the following requirements and cautions:

Accessories: Accessories that come in contact with the Stainless Steel Lath shall be either stainless steel or vinyl in order to avoid galvanic corrosion that occurs when dissimilar metals touch.

Fasteners: Stainless Steel Fasteners and washers are recommended for attachment of Stainless Steel Lath. Should standard galvanized fasteners be used, then to prevent standard galvanized fasteners from coming in contact with the Stainless Steel Lath, they are to be separated by washers made of plastic, neoprene or some other inert material. Consult with fastener manufacturer as to fastener recommendations.

Continuous Application: Provide isolation of standard galvanized Lath from Stainless Steel Lath if used in a continuous application.



nilesbldg.com • 800-323-3329

MANUFACTURED TO MEET ASTM: C841,C847, C1063

Stainless Steel lath manufactured to ASTM C847 standards with the exception that Stainless Steel is being used instead of Galvanized Steel. Stainless Steel lath available in Type 304 or Type 316 material.

Niles Facility 1600 Hunter Street Niles, OH 44446 Jacksonville Facility 8441 Western Way Jacksonville, FL 32256 **Dallas-Ft. Worth Facility** 2303 I-30 Frontage Road Ste 100 Grand Prairie, TX 75050